



LOC I-GBI 108.5	APP CRS 055°	Rwy Idg TDZE Apt Elev 7569 708 727
---------------------------	------------------------	--

ILS or LOC RWY 5


BUFFALO NIAGARA INTL (BUF)

RADAR required for procedure entry. RNP APCH - GPS. ADF required for LOC only.			MALSR	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.
Autopilot coupled approach NA. For inop ALS, increase S-LOC 5 Cats C and D visibility to RVR 5500.				

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC
-------------------------	--	-------------------------------------	-------------------------------	--------------------------------	-------

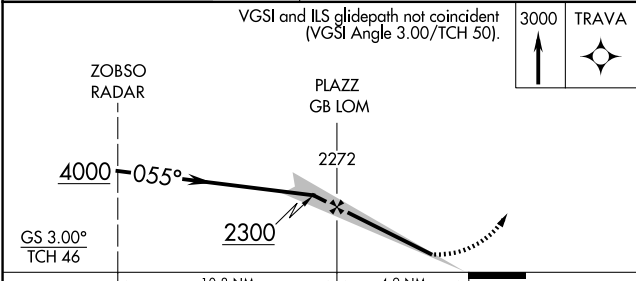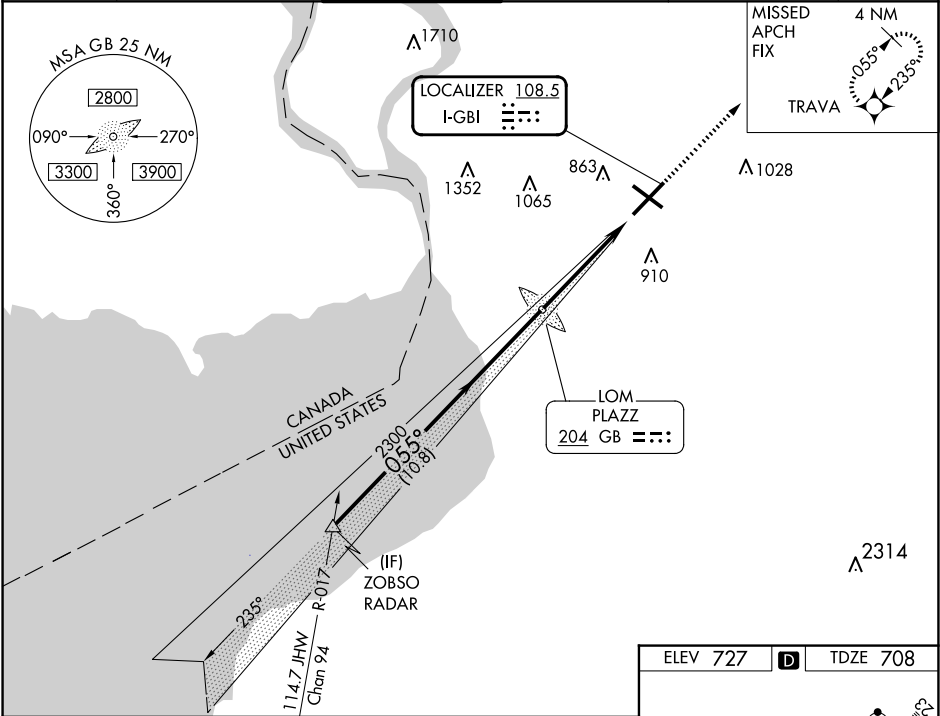

	10.8 NM				4.9 NM			
CATEGORY	A		B		C		D	
S-ILS 5	908/18 200 (200-½)							
S-LOC 5	1060/24 352 (400-½)				1060/30 352 (400-¾)			
C CIRCLING	1200-1 473 (500-1)				1220-1½ 493 (500-1½)		1340-2 613 (700-2)	

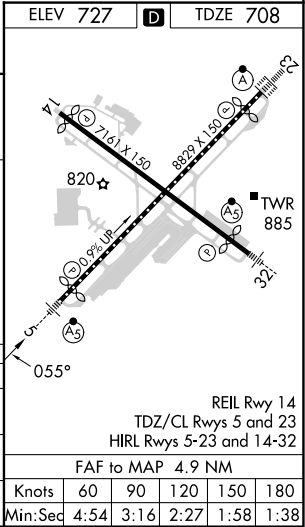

NE-2, 12 JUN 2025 to 10 JUL 2025

NE-2, 12 JUN 2025 to 10 JUL 2025