



WAAS CH 70311 W05A	APP CRS 055°	Rwy Idg 7569 TDZE 708 Apt Elev 727
--	------------------------	---

RNAV (GPS) Y RWY 5
BUFFALO NIAGARA INTL (BUF')

RNP APCH - GPS For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			MALSR	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.	
D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC

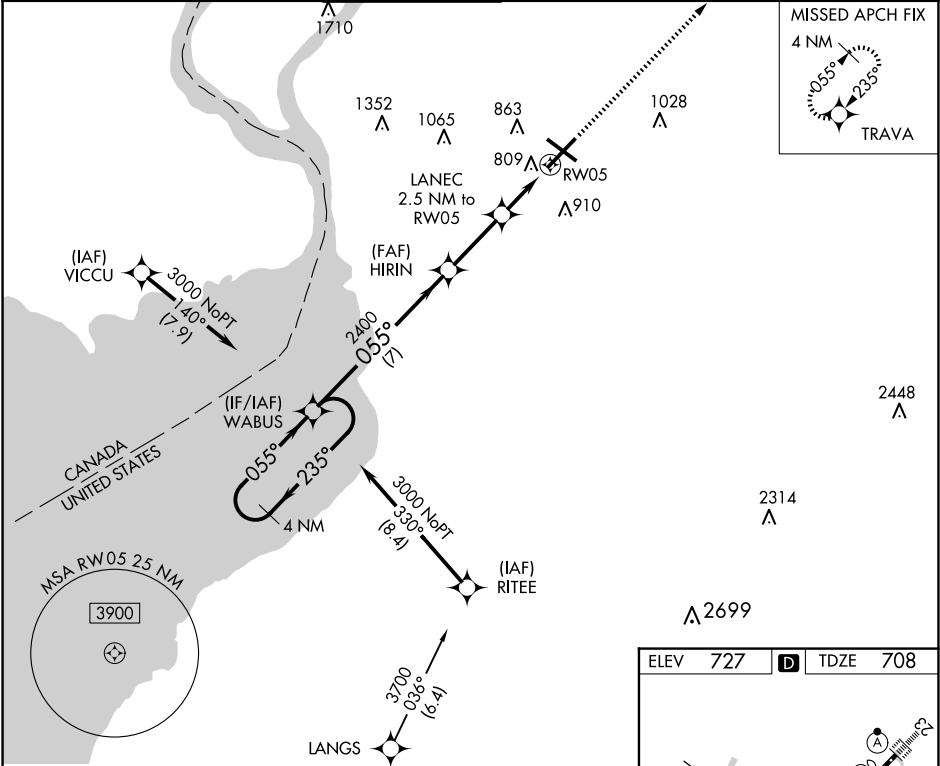

4 NM Holding Pattern		WABUS	HIRIN	LANEC 2.5 NM to RW05	3000	TRAVA
3000		235°	055°	2400	*1.1 NM to RW05	*LNAV only
GP 3.00° TCH 46				*1520	RW05	
		7 NM	2.8 NM	1.4 NM	1.1 NM	
CATEGORY	A	B	C	D		
LPV DA	908/18		200 (200-½)			
LNAV/VNAV DA	997/24		289 (300-½)			
LNAV MDA	1060/24	352 (400-½)	1060/35	352 (400-¾)		
CIRCLING	1200-1	473 (500-1)	1220-1½	1340-2		
			493 (500-1½)	613 (700-2)		

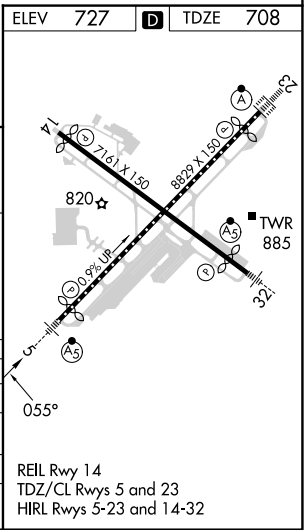

NE-2, 12 JUN 2025 to 10 JUL 2025

NE-2, 12 JUN 2025 to 10 JUL 2025