


TOP ALTITUDE: 8000	NOTE: For turbo jets only. NOTE: If unable to accept climb rates, advise ATC on initial contact. NOTE: Transponder code will be issued via PDC or Charlotte CINC DEL. NOTE: Accelerate to 250K; if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K; if unable advise ATC.	
	RINAV 1-DME/DME/IRU or GPS. RADAR required.	CHARLOTTE DEP CON 120.5 257.2 D-ATIS DEP 132.1 CINC DEL 127.15 348.6 CPDLC GND CON 121.8 348.6 (WEST) 121.9 348.6 (EAST) CHARLOTTE TOWER 118.1 257.8 (Rwy's 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)

TAKEOFF MINIMUMS
 Rwys 18L/C/R, 36C/R: Standard with minimum climb of 500' per NM to 1260.
 Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

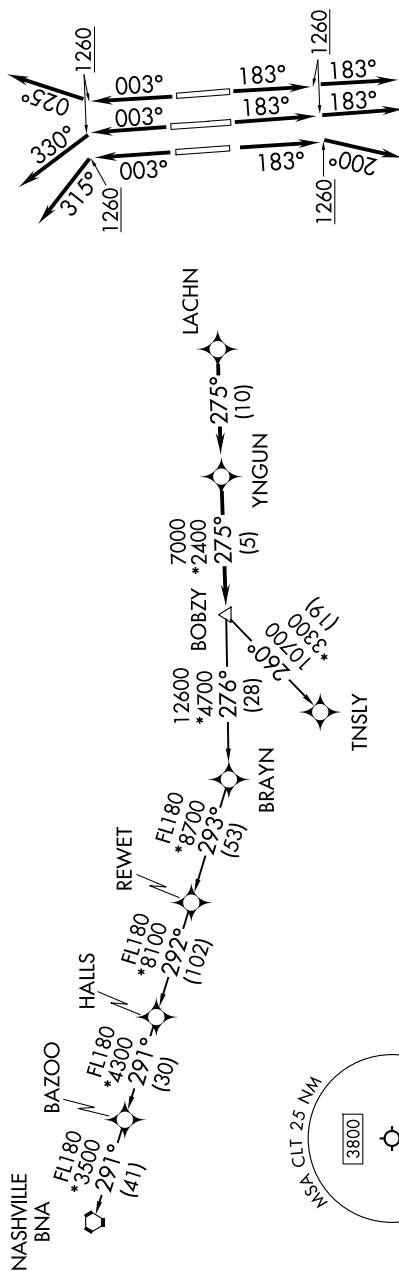

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-2, 12 JUN 2025 to 10 JUL 2025