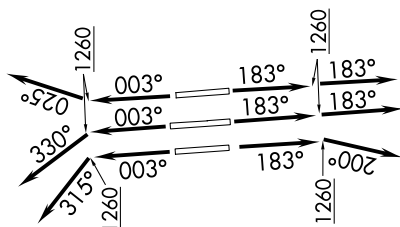


CHARLOTTE, NORTH CAROLINA

$$Z \leftarrow$$


Standard with minimum climb of 500' per NM to 1260.  
Standard with minimum climb of 500' per NM to 1400.

NOTE: Chart not to scale.

|                              |
|------------------------------|
| RNAV 1 - DME/DME/IRU or GPS. |
| RADAR required.              |

**TOP ALTITUDE:**  
**8000**

**NOTE:** For turbo jets only.  
**NOTE:** If unable to accept climb rates, advise ATC on initial contact.  
**NOTE:** Transponder code will be issued via PDC or Charlotte CLNC DEL.  
**NOTE:** Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

**TAKEOFF MINIMUMS**  
Rwys 18L/C/R, 36C/R:  
Rwy 36L:

(CONTINUED ON FOLLOWING PAGE)

SE-2, 12 JUN 2025 to 10 JUL 2025