


WAAS CH 45526 W05A	APP CRS 052°	Rwy Idg TDZE Apt Elev	7001 228 236
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 5
COLUMBIA METRO (CAE)

RNP APCH - GPS		MALSR 	MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.15	COLUMBIA APP CON 133.4 285.6 (290°-109°) 124.15 338.2 (110°-289°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6	CLNC DEL 119.75
-----------------------	---	--------------------------------------	-------------------------------	---------------------------

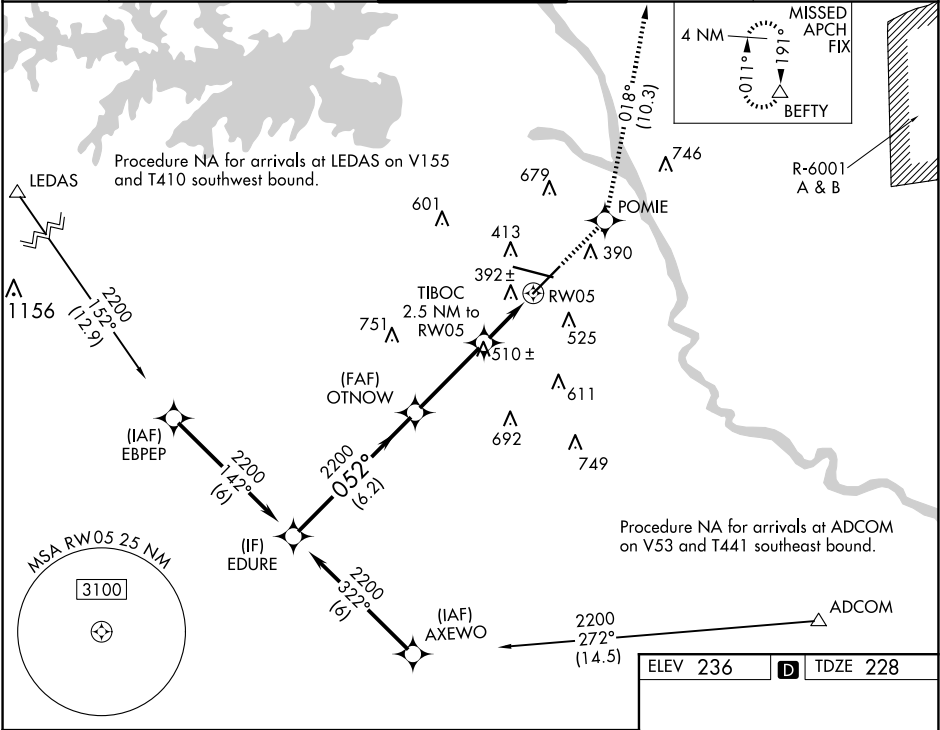

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		2400 POMIE	BEFTY
EDURE		OTNOW	
2200 052°		2200	
GP 3.00° TCH 60		1080	
6.2 NM		3.5 NM	1.2 NM
2.5 NM to RW05		1.3 NM to RW05	
CATEGORY	A	B	C
LPV DA*	428/24 200 (200-½)		
LNAV/VNAV DA	638/40 410 (500-¾)		
LNAV MDA	700/24 472 (500-½)	700/50	472 (500-1)
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)

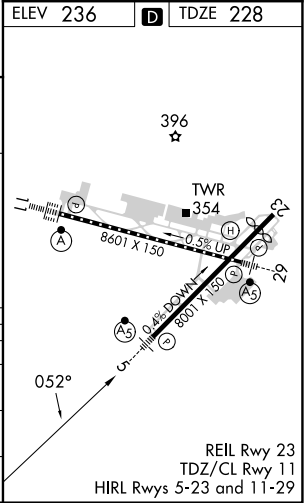

SE-2, 12 JUN 2025 to 10 JUL 2025

SE-2, 12 JUN 2025 to 10 JUL 2025