


RNAV (GPS) RWY 13L

APCH CRS	Rwy Idg	5002
132°	TDZE	18
	Arpt Elev	18

[USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH			MISSED APPROACH: Climb to 600, then climbing right turn to 1600 direct POLCK and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).					
ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 0 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR

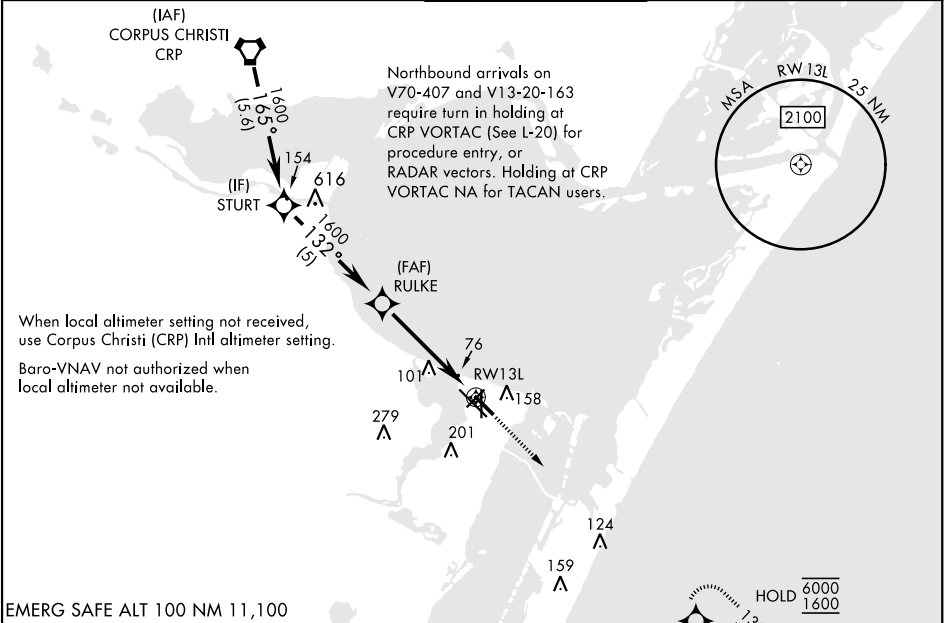


EMERG SAFE ALT 100 NM 11,100

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.	600	1600	POLCK
--	-----	------	-------

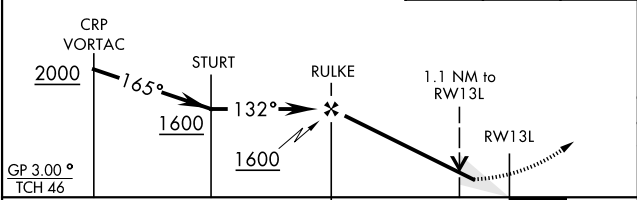

CATEGORY	A	B	C	D
LNAV/VNAV DA	268-1	250	(300-1)	
LNAV MDA	400-1 382 (400-1)	400-1½ 382 (400-1½)		
CIRCLING	440-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	420-1 402 (500-1)	420-1½ 402 (500-1½)		
CIRCLING	500-1 482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)	

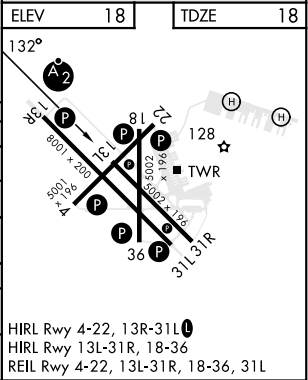

RNAV (GPS) RWY 13L

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025