

VORTAC DIK

112.9

Chan 76

APP CRS

183°

Rwy ldg TDZE

N/A

Apt Elev

2592

DICKINSON/THEODORE ROOSEVELT RGNL (DIK)


VOR-A

⚠

When local altimeter setting not received, use Bowman altimeter setting and increase all MDAs 280 feet, increase Circling Cat C visibility ¾ SM, Cat D visibility 1 SM.

MISSED APPROACH: Climb to 4600 then turn left direct DIK VORTAC and hold.

ASOS 118.375	MINNEAPOLIS CENTER 124.25 236.825	UNICOM 123.0 (CTAF) 0
-----------------	--------------------------------------	--------------------------

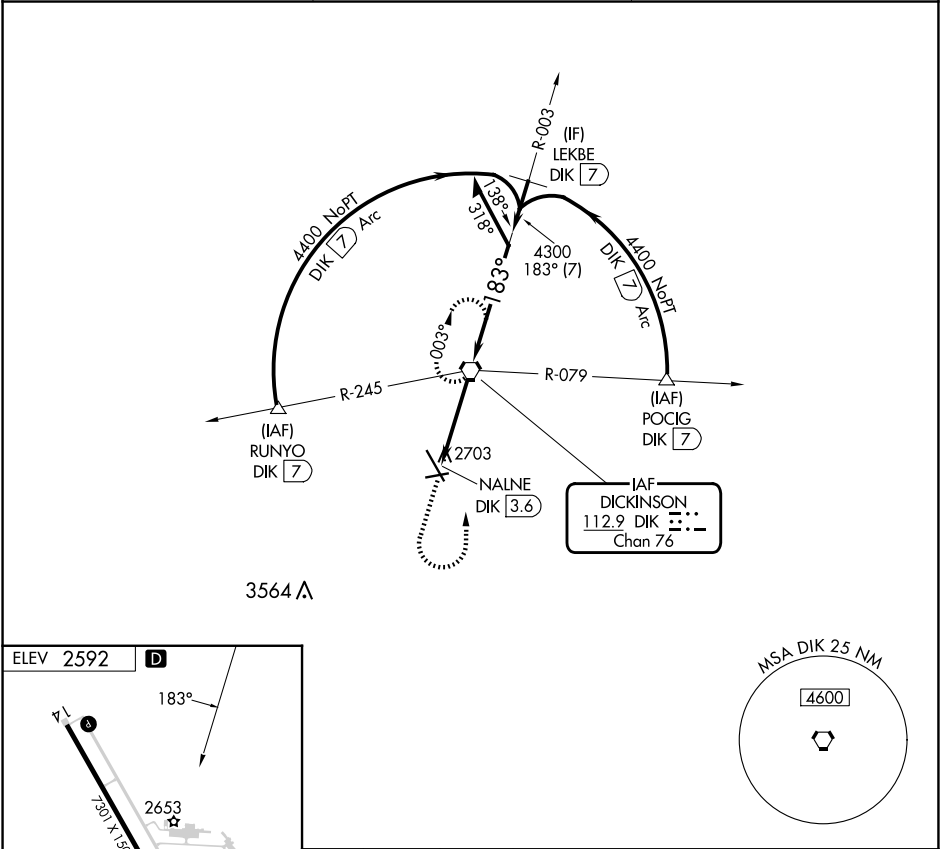

ELEV 2592

D

183°

7301 X 150

2653

4700 X 73

0.4% UP

32

45

HIRL Rwy 14-32

MIRL Rwy 7-25

REIL Rws 7, 14 and 25

FAF to MAP 3.6 NM					
Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

4600

DIK

DIK VORTAC

003°

4400

183°

4300

3.6 NM

MSA DIK 25 NM

4600

CATEGORY	A	B	C	D
CIRCLING	3080-1 488 (500-1)	3100-1 508 (600-1)	3120-1½ 528 (600-1½)	3220-2 628 (700-2)