
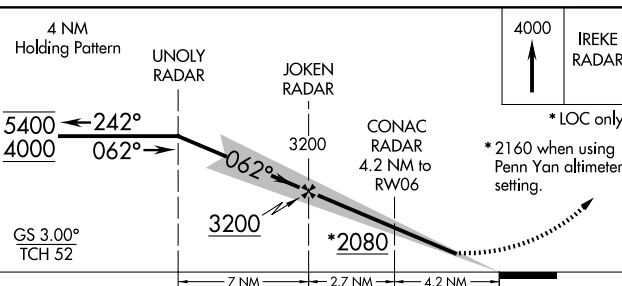


ILS or LOC RWY 6
ELMIRA/CORNING RGNL (ELM)

 Inop table does not apply to S-L0C 6 Cats C/D. Circling NA to Rwy 5 and 23.
 Circling NA for Cat D south of Rwy 10 and 28. Circling Rwy 10 NA at night.
 For inop ALS, increase S-L0C 6 CONAC fix minimums Cats C/D visibility to 2 1/2 SM.
 **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 4000 direct
IREKE/RADAR and
hold.

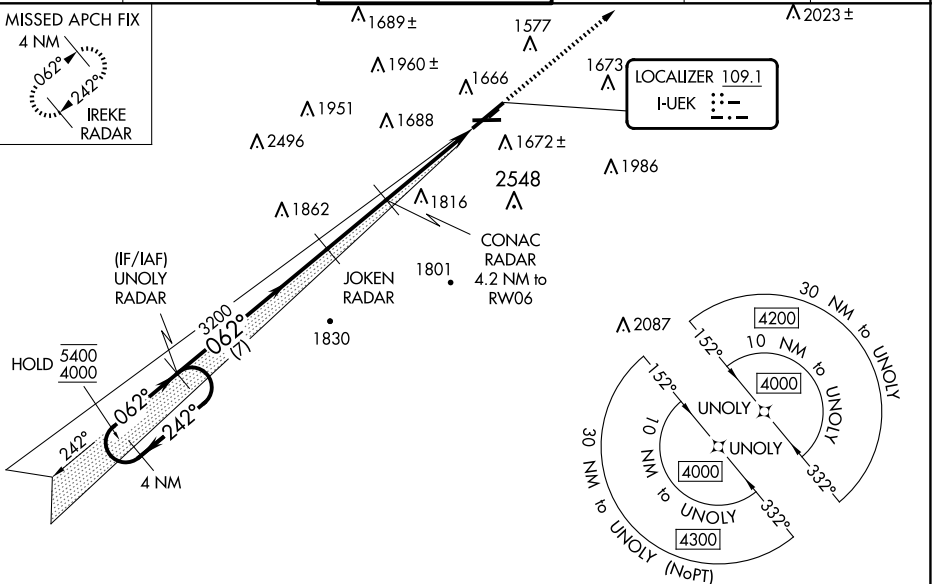

CATEGORY	A	B	C	D
S-ILS 6 **	1144/24 200 (200-½)			
S-LOC 6	2080/40 1136 (1200-¾)	2080/55 1136 (1200-1)	2080-3	1136 (1200-3)
C CIRCLING	2080-1¼ 1125 (1200-¼)	2080-1½ 1125 (1200-½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)
CONAC FIX MINIMUMS				
S-LOC 6	1740/24 796 (800-½)	1740/40 796 (800-¾)	1740-1¾	796 (800-1¾)
C CIRCLING	2020-1¼ 1065 (1100-¼)	2080-1½ 1125 (1200-½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)

FAF to MAP 6.9 NM					
Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

NE-2, 12 JUN 2025 to 10 JUL 2025

NE-2, 12 JUN 2025 to 10 JUL 2025