


WAAS CH 40223 W26A	APP CRS 265°	Rwy Ldg TDZE 3962 Apt Elev 3962
--	------------------------	---


RNAV (GPS) Y RWY 26L


EL PASO INTL (ELP)

RNP APCH-GPS.		MALSR 	MISSED APPROACH: Climb to 4380 then climbing right turn to 7500 direct FABAN and hold.	
▼ ▲ ASR	Circling NA for Cat D west of Rwy 4-22. For inop ALS, increase LP and LNAV Cat A/B visibility to 1 SM, and Cat C/D to 1½ SM.			
D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1

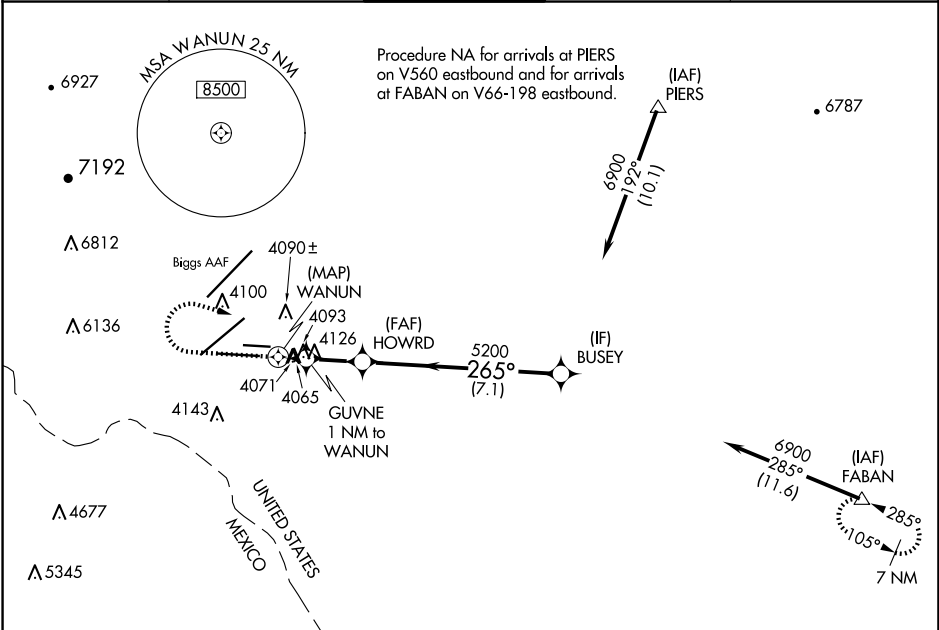

ELEV 3962	D	TDZE 3962
-----------	----------	-----------

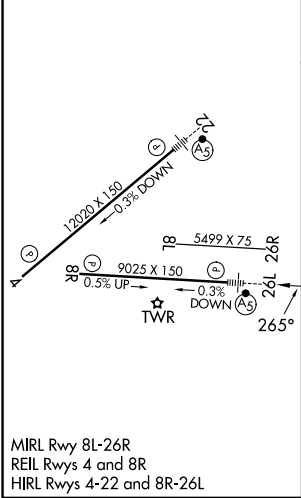

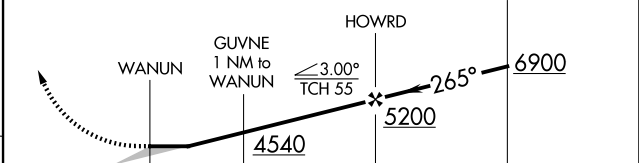4380	7500	FABAN	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 75).			
 The diagram illustrates the approach procedure. It starts with a dashed line representing the initial approach, followed by a solid line for the final approach. Key altitudes are marked: 4380, 7500, 4540, 5200, and 6900. Distances are indicated: 0.7, 1 NM, 2 NM, and 7.1 NM. Angles shown are 3.00° TCH 55 and 265°. Waypoints and features include WANUN, GUVNE (1 NM to WANUN), HOWRD, and BUSEY. A circling symbol is present in the FABAN column.						
CATEGORY		A	B	C	D	
LP	MDA	4380-¾ 418 (500-¾)				
LNAV	MDA	4380-¾ 418 (500-¾)				
 CIRCLING		4420-1 458 (500-1)	4440-1 478 (500-1)	4480-1½ 518 (600-1½)	4680-2¼ 718 (800-2¼)	

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025