

WAAS	APCH CRS	Rwy Idg
Chan 52202	228°	TDZE 200
W23A		Arprt Elev 225


RNAV (GPS) RWY 23

[USAF]


POPE AAF (KPOB)

RADAR required		ALSF-1 	MISSED APPROACH: Climbing right turn to 2000 direct AWGUS and hold.
	*When ALS inop, increase RVR to 40 vis to ¾ mile. **When ALS inop, increase vis to 1¼ mile. ***When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile; CAT CD vis to 1¾ miles. ****Circling not authorized SE of Rwy 5-23.		


ATIS 132.3 353.725	FAYETTEVILLE APP CON 125.175 285.575 (271° - 090°) 133.0 290.25 (091° - 270°)	TOWER 135.025 291.1	GND CON 124.55 275.8	CLNC DEL 124.55 275.8
------------------------------	---	-------------------------------	--------------------------------	---------------------------------

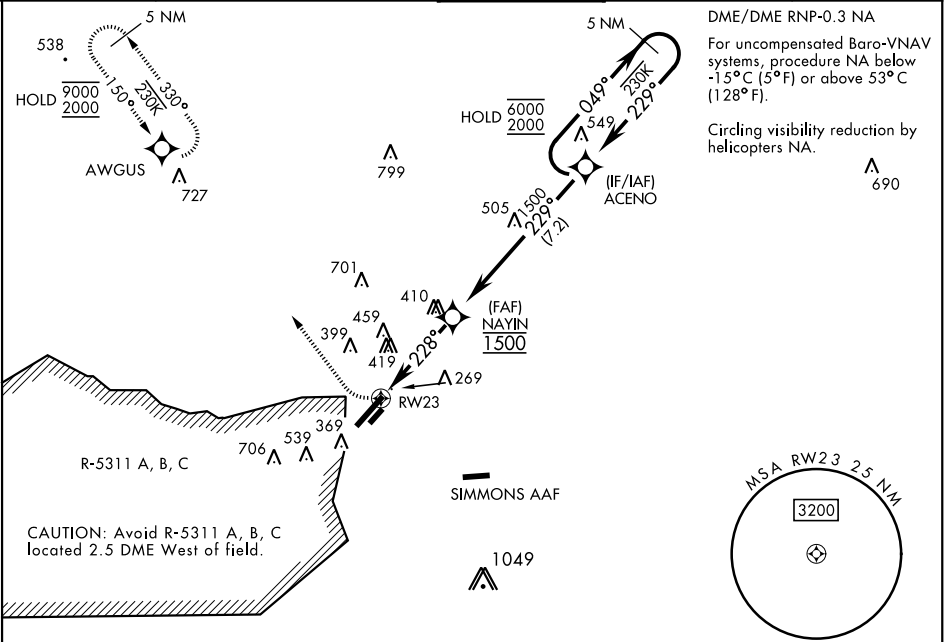

EMERG SAFE ALT 100 NM 5300

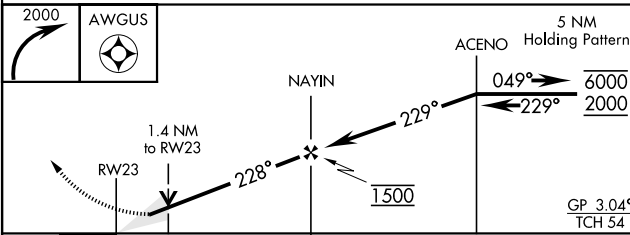

CATEGORY	A	B	C	D
LPV *	400/24	200	(200-½)	
LNAV/ **	572/40	372	(400-¾)	
VNAV DA				
***	720/24	520 (600-½)	720/55	520 (600-1)
****	760-1	542 (600-1)	920-2	1060-2¾
CIRCLING			702 (800-2)	842 (900-2¾)

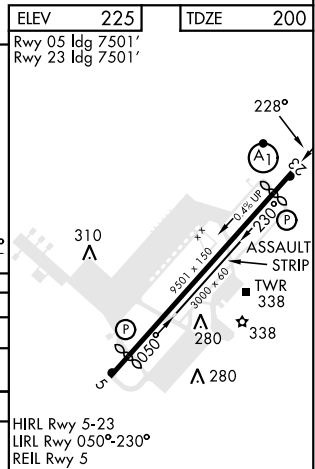

RNAV (GPS) RWY 23

SE-2, 12 JUN 2025 to 10 JUL 2025

SE-2, 12 JUN 2025 to 10 JUL 2025