


|                                        |                        |                                                                |
|----------------------------------------|------------------------|----------------------------------------------------------------|
| WAAS<br>CH <b>93609</b><br><b>W05A</b> | APP CRS<br><b>050°</b> | Rwy Idg <b>11981</b><br>TDZE <b>815</b><br>Apt Elev <b>815</b> |
|----------------------------------------|------------------------|----------------------------------------------------------------|

RNAV (GPS) RWY 5

FORT WAYNE INTL (FWA)

|                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                     |                                                      |                                           |                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------|---------------------------------------|
| <div><div><div><div></div><div></div><div></div></div><div>ASR</div></div><div>For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat C/D/E visibility to 1¾ SM.</div></div> | <div><div>ALSF-2</div><div><div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div></div></div><div>MISSED APPROACH:<br/>Climb to 3000 direct<br/>SLYDR and hold.</div></div> |                                                      |                                           |                                       |
| <div>ATIS</div> <div>121.25 360.825</div>                                                                                                                                                                                                                                                                                                         | <div>FORT WAYNE APP CON</div> <div>127.2 284.6</div>                                                                                                                                                                                                | <div>FORT WAYNE TOWER</div> <div>119.1 269.325</div> | <div>GND CON</div> <div>121.9 348.6</div> | <div>CLNC DEL</div> <div>124.75</div> |

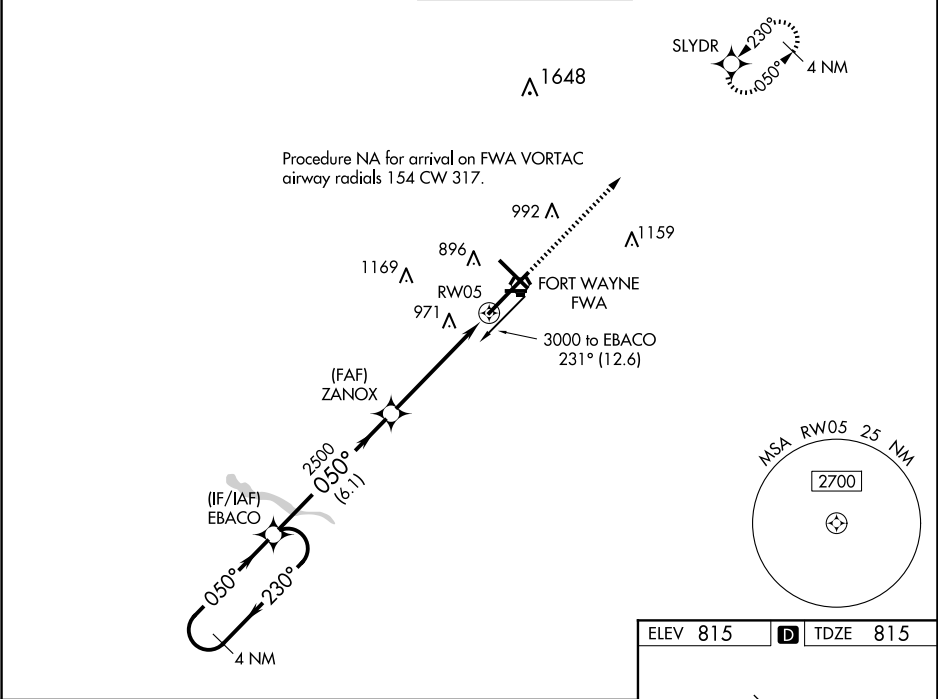

|                      |                      |             |                         |                         |                         |
|----------------------|----------------------|-------------|-------------------------|-------------------------|-------------------------|
| 4 NM Holding Pattern |                      | EBACO       | ZANOX                   | 3000                    | SLYDR                   |
| 3000                 |                      | 230°        | 050°                    | 2500                    | * LNAV only.            |
| GP 3.00°<br>TCH 55   |                      | 050°        | 2500                    | * 1.4 NM to RW05        | RW05                    |
|                      |                      | 6.1 NM      | 3.7 NM                  | 1.4 NM                  |                         |
| CATEGORY             | A                    | B           | C                       | D                       | E                       |
| LPV DA               | 1065/18 250 (300-½)  |             |                         |                         |                         |
| LNAV/VNAV DA         | 1275/60 460 (500-1¼) |             |                         |                         |                         |
| LNAV MDA             | 1300/24              | 485 (500-½) | 1300/50                 | 485 (500-1)             |                         |
| CIRCLING             | 1300-1               | 485 (500-1) | 1420-1¼<br>605 (700-1¾) | 1520-2¼<br>705 (800-2¼) | 1520-2½<br>705 (800-2½) |

