
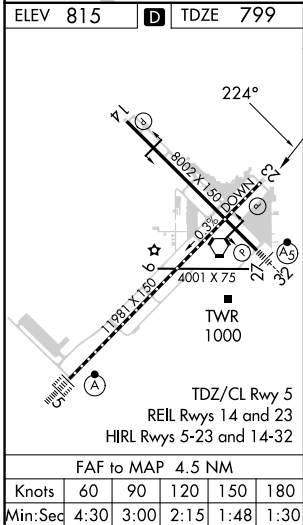


|            |         |          |       |
|------------|---------|----------|-------|
| VORTAC FWA | APP CRS | Rwy Idg  | 11981 |
| 117.8      | 224°    | TDZE     | 799   |
| Chan 125   |         | Apt Elev | 815   |

VOR or TACAN RWY 23

FORT WAYNE INTL (FWA)

|                                                                       |                    |                                                                                                    |             |          |
|-----------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------|-------------|----------|
| <div><div><div><div></div><div></div></div><div>ASR</div></div></div> |                    | MISSED APPROACH: Climbing left turn to 3000 on FWA VORTAC R-134 to OSBER INTL/FWA 22 DME and hold. |             |          |
| ATIS                                                                  | FORT WAYNE APP CON | FORT WAYNE TOWER                                                                                   | GND CON     | CLNC DEL |
| 121.25 360.825                                                        | 127.2 284.6        | 119.1 269.325                                                                                      | 121.9 348.6 | 124.75   |

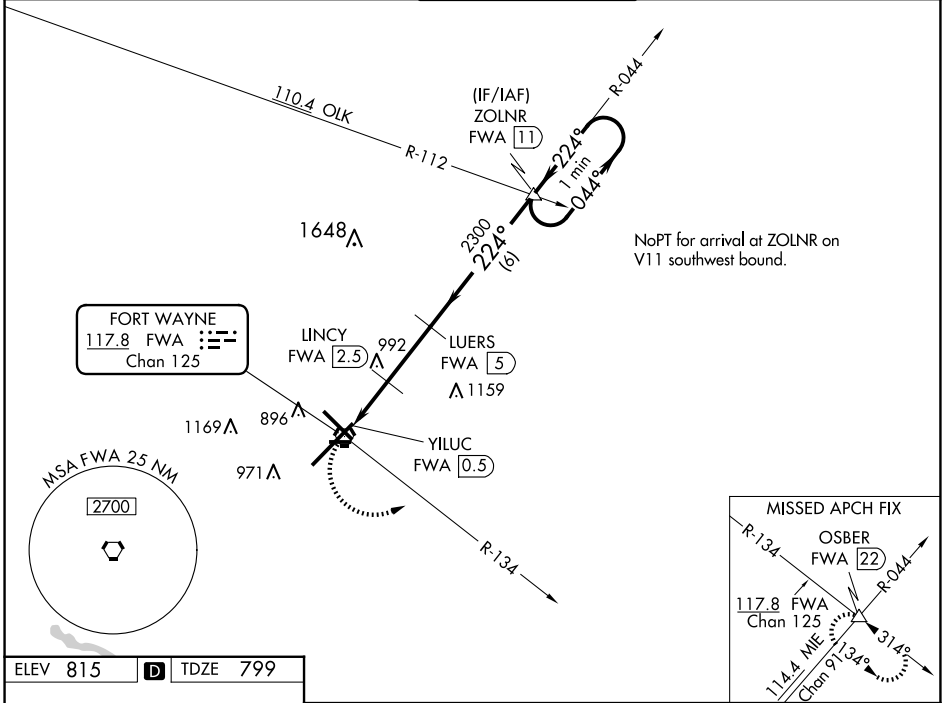

|                    |         |            |             |                 |                         |                       |                         |                                                                  |                         |  |
|--------------------|---------|------------|-------------|-----------------|-------------------------|-----------------------|-------------------------|------------------------------------------------------------------|-------------------------|--|
| 3000               |         | OSBER<br>△ |             | LUERS FWA (5)   |                         | ZOLNR FWA (11)        |                         | One Minute Holding Pattern                                       |                         |  |
| FWA R-134          |         |            |             | LINCY FWA (2.5) |                         | 044° → 3000<br>← 224° |                         |                                                                  |                         |  |
| YILUC FWA (0.5)    |         | FWA (1.8)  |             | 224°            |                         | 2300                  |                         | VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 76). |                         |  |
|                    |         | 3.04°      |             | TCH 55          |                         |                       |                         |                                                                  |                         |  |
| 1.3                |         | 0.7 NM     |             | 2.5             |                         | 6 NM                  |                         |                                                                  |                         |  |
| CATEGORY           | A       |            | B           |                 | C                       |                       | D                       |                                                                  | E                       |  |
| S-23               | 1400/55 |            | 601 (600-1) |                 | 1400-1¾                 |                       | 601 (600-1¾)            |                                                                  |                         |  |
| CIRCLING           | 1400-1  |            | 585 (600-1) |                 | 1420-1¾<br>605 (700-1¾) |                       | 1520-2¼<br>705 (800-2¼) |                                                                  | 1520-2½<br>705 (800-2½) |  |
| LINCY FIX MINIMUMS |         |            |             |                 |                         |                       |                         |                                                                  |                         |  |
| S-23               | 1300/55 |            | 501 (500-1) |                 | 1300-1⅜                 |                       | 501 (500-1⅜)            |                                                                  |                         |  |
| CIRCLING           | 1300-1  |            | 485 (500-1) |                 | 1420-1¾<br>605 (700-1¾) |                       | 1520-2¼<br>705 (800-2¼) |                                                                  | 1520-2½<br>705 (800-2½) |  |