


WAAS CH 77937 W10D	APP CRS 090°	Rwy Ldg TDZE Apt Elev	7500 680 680
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 10R

CHICAGO O'HARE INTL (ORD)

RNP APCH.	Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.	ALS F-2 	MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.
-----------	---	-------------	--

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	124.125 GND CON (TWR CENTER) 118.05 (TWR NORTH) 226.675 (TWR SOUTH) (ALL TWRs)	121.75 (TWR CENTER) 121.9 (TWR NORTH) (TWR SOUTH)	CLNC DEL 121.6	CPDLC
--	--	------------------------------------	--	---	--------------------------	-------

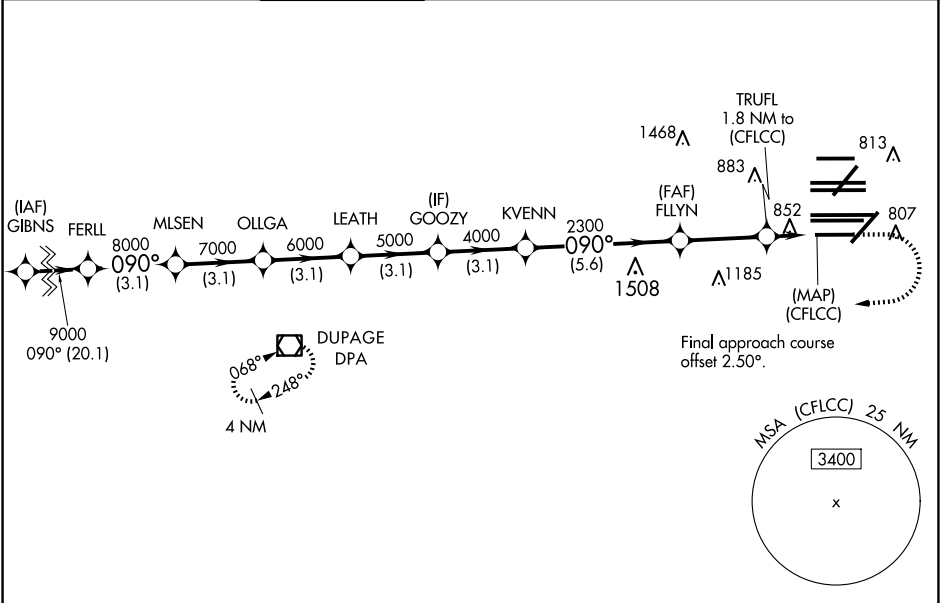

		1200		4000		DPA		ELEV 680	TDZE 680
		* LNAV only.							
CATEGORY		A		B		C		D	
LPV DA		930/24		250 (300-½)					
LNAV/VNAV DA		1157/50		477 (500-1)					
LNAV MDA		1120/24		440 (500-½)		1120/40		440 (500-¾)	
		HIRL all Rwy's TDZ/CL all Rwy's except 4L							

EC-3, 12 JUN 2025 to 10 JUL 2025

EC-3, 12 JUN 2025 to 10 JUL 2025