
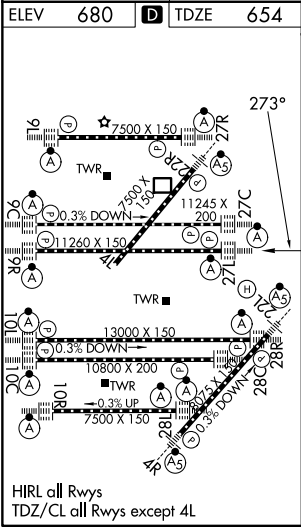


WAAS CH 77804 W27A	APP CRS 273°	Rwy Ldg 11260 TDZE 654 Apt Elev 680
--	------------------------	--

RNAV (GPS) Z RWY 27L

CHICAGO O'HARE INTL (ORD)

RNP APCH - GPS.				ALSIF-2		MISSED APPROACH: Climb to 4000 direct WASCO and hold.	
Simultaneous approach authorized. INAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -19°C or above 54°C.							
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC	

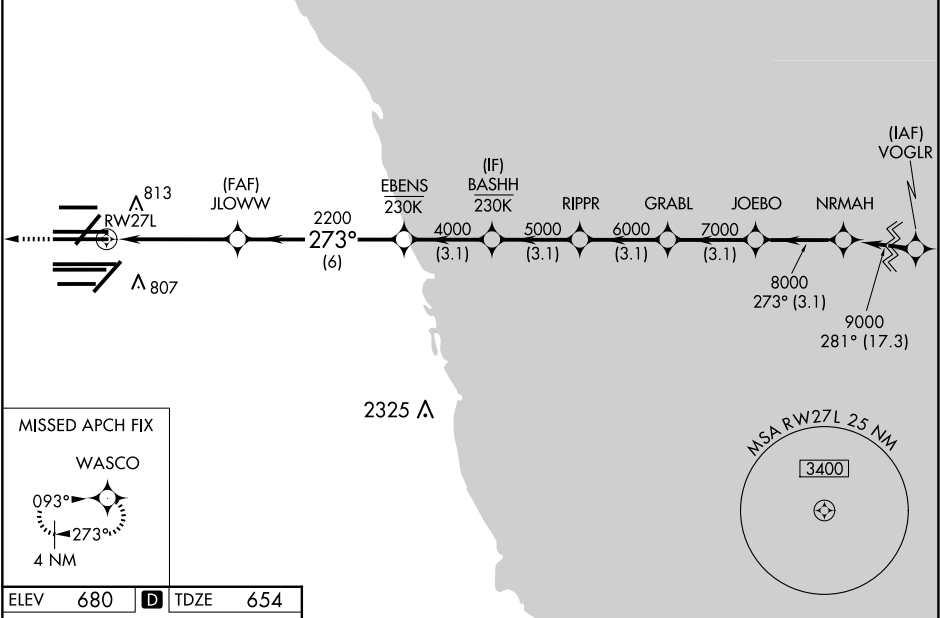

ELEV 680		TDZE 654
4000		WASCO
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).		
NRMAH		
GRABL		
JOEBO		
RIPPR		
BASHH		
EBENS		
JLOWW		
RW27L		
1.2 NM to RW27L		
2200		
4000		
5000		
6000		
7000		
8000		
9000		
GP 3.00°		
TCH 57		
CATEGORY	A	B
LPV	DA	854/18
LNNAV/VNAV	DA	1088/40
LNNAV MDA	1100/24	446 (500-1/2)