

WAAS CH 97606 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	6050 826 826
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27


GOSHEN MUNI ((GSH))

RNP APCH - GPS.


▼ Baro-VNAV and VDP NA when using ASW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwy 5 and 23. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use ASW altimeter setting and increase LPV DA to 1251 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1346 feet. Increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM.

▲ MISSED APPROACH: Climb to 2500 direct JANUG and on 274° track to CPONE and hold.

ASOS 121.45	SOUTH BEND APP CON ★ 132.05 257.8	CLNC DEL 125.25	UNICOM 123.05 (CTAF) 0
-----------------------	---	---------------------------	----------------------------------

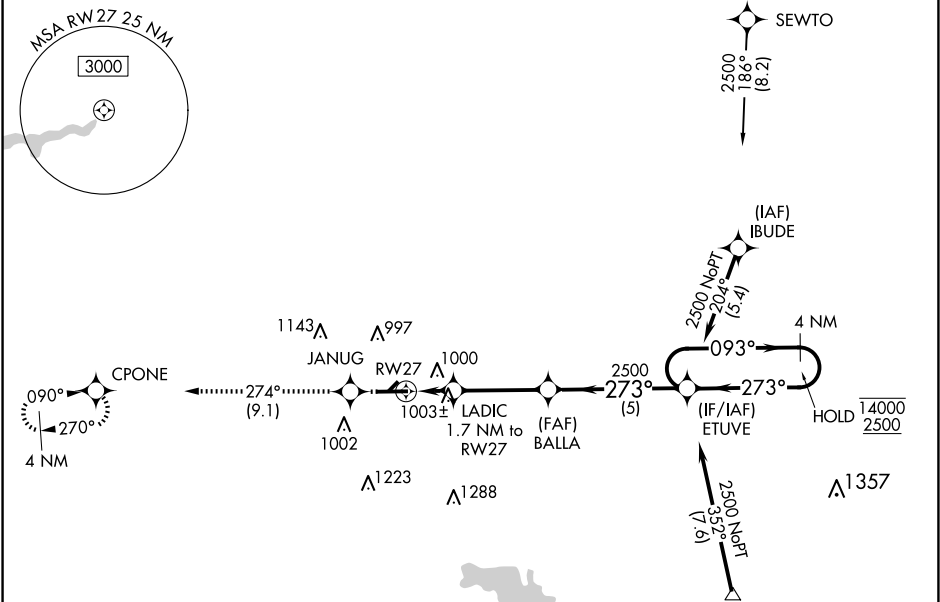

ELEV 826	TDZE 826
-----------------	-----------------

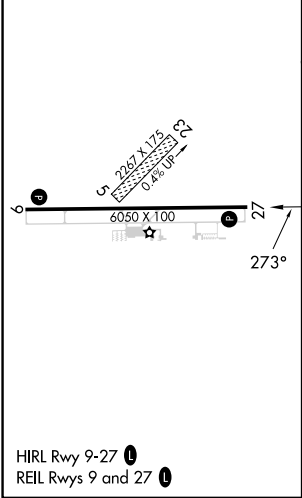

2500	JANUG	CPONE		
	tr 274°			
			BALLA	ETUVE
			2500	4 NM Holding Pattern
			1.2 NM to RW27	1.7 NM to RW27
			1400	2500
			1.2 NM	0.5
			3.4 NM	5 NM
CATEGORY	A	B	C	D
LPV DA	1212-1 1/8	386 (400-1 1/8)		
LNAV/VNAV DA	1307-1 1/8	481 (500-1 1/8)		
LNAV MDA	1260-1	434 (500-1)	1260-1 1/4	1260-1 1/2
			434 (500-1 1/4)	434 (500-1 1/2)
CIRCLING	1300-1	1320-1	1500-2	1560-2 1/4
	474 (500-1)	494 (500-1)	674 (700-2)	734 (800-2 1/4)