

|               |             |                     |
|---------------|-------------|---------------------|
| LOC/DME I-CNL | APP CRS     | Rwy Ldg             |
| <b>111.3</b>  | <b>047°</b> | <b>7200</b>         |
| Chan 50       |             | TDZE <b>260</b>     |
|               |             | Apt Elev <b>266</b> |

ILS or LOC RWY 4R


BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

**▼** Rwy 4R helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. For inop ALS, increase S-ILS 4R all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1 1/4 SM. OGRAY Fix Minimums: For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D to 1 1/2 SM.

**MALSR**

**MISSED APPROACH:** Climb to 800 then climbing right turn to 4000 on heading 110° and LIT VORTAC R-089 to ATERS INT/UIT 16 DME and hold.

|               |                     |                    |                    |               |
|---------------|---------------------|--------------------|--------------------|---------------|
| D-ATIS        | LITTLE ROCK APP CON | ADAMS TOWER        | GND CON            | CLNC DEL      |
| <b>125.65</b> | <b>135.4 353.6</b>  | <b>118.7 257.8</b> | <b>121.9 339.8</b> | <b>118.95</b> |

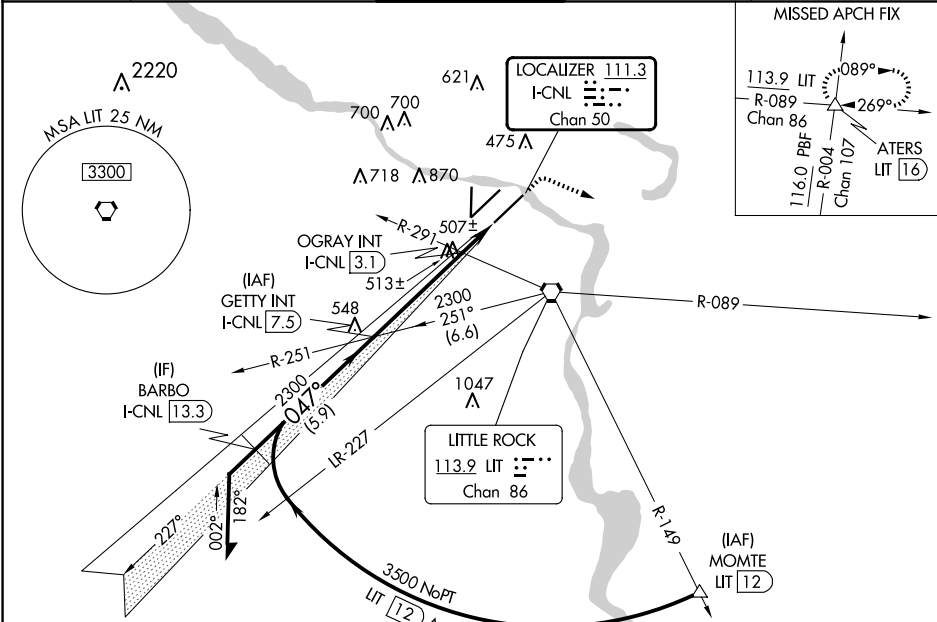

|          |          |          |
|----------|----------|----------|
| ELEV 266 | <b>D</b> | TDZE 260 |
|----------|----------|----------|

Remain within 10 NM

800

4000

LIT R-089

ATERS

GS 3.00° TCH 49

Use I-CNL DME when on the localizer course.

| CATEGORY                                   | A           | B             | C                | D               |
|--------------------------------------------|-------------|---------------|------------------|-----------------|
| S-ILS 4R                                   |             | 523/40        | 263 (300-3/4)    |                 |
| S-LOC 4R                                   | 880/40      | 620 (700-3/4) | 880-1 3/8        | 620 (700-1 1/2) |
| <b>C</b> CIRCLING                          | 880-1       | 1000-1        | 1180-2 3/4       | 1180-3          |
|                                            | 614 (700-1) | 734 (800-1)   | 914 (1000-2 3/4) | 914 (1000-3)    |
| OGRAY (DUAL VOR RECEIVERS OR DME REQUIRED) |             |               |                  |                 |
| S-LOC 4R                                   | 780/40      | 520 (600-3/4) | 780/55           | 520 (600-1)     |
| <b>C</b> CIRCLING                          | 820-1       | 1000-1        | 1180-2 3/4       | 1180-3          |
|                                            | 554 (600-1) | 734 (800-1)   | 914 (1000-2 3/4) | 914 (1000-3)    |

