ILS or LOC RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

LOC/DME I-JJM	APP CRS	Rwy Idg	7800
110.55	350°	TDZE	479
Chan 42 (Y)		Apt Elev	501

DME or RADAR required for LOC only.

Simultaneous approach authorized. Circling Rwy 11 NA at night. For inop ALS, increase LOC Cat C/D to 5000 RVR.

ALSF-2

MISSED APPROACH: Climb to 2500 then climbing left turn to 4000 on heading 350° and on IIU VORTAC R-332 to HEALS/28.3 DME/RADAR and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

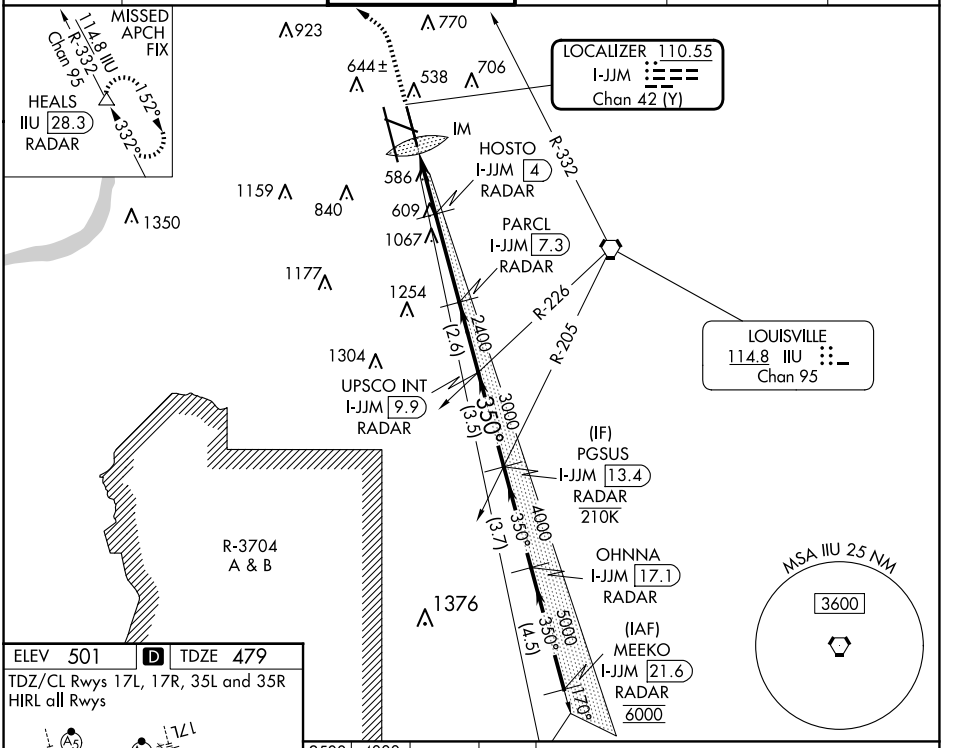

ELEV 501	D	TDZE 479

TDZ/CL Rwys 17L, 17R, 35L and 35R
HIRL all Rwys

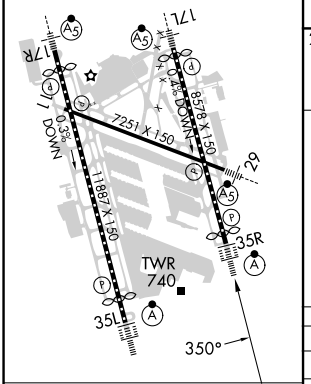

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

2500	4000 hdg 350°	IIU R-332	HEALS △

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

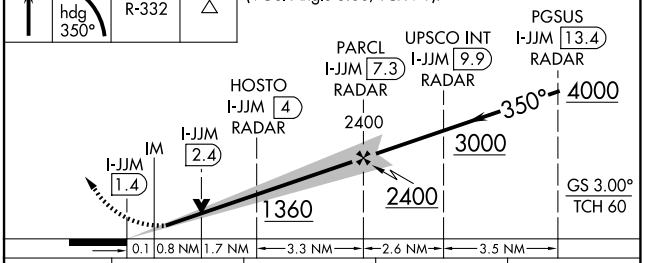

CATEGORY	A	B	C	D
S-ILS 35R	679/18 200 (200-½)			
S-LOC 35R	840/24 361 (400-½)		840/35 361 (400-⅝)	
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 12 JUN 2025 to 10 JUL 2025
SE-1, 12 JUN 2025 to 10 JUL 2025