

WAAS
CH **70709**
W35D

APP CRS
350°

Rwy ldg
TDZE **479**
Apt Elev
501

RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.


Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.

ALSF-2


MISSED APPROACH:
Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

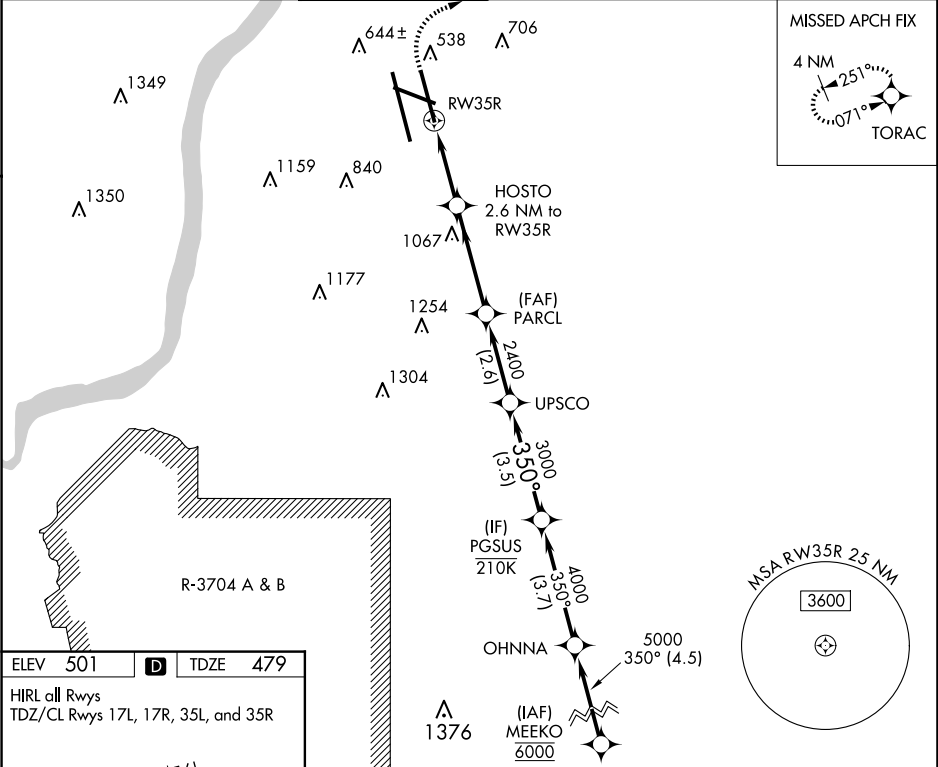

ELEV **501** **D** TDZE **479**

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L, and 35R

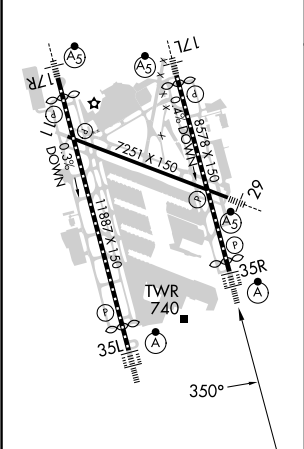

1600 4000 TORAC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

PGSUS 4000

350°

3000

2400

1360

1.4 NM to RW35R

2.6 NM to RW35R

3.3 NM

2.6 NM

3.5 NM

GP 3.00° TCH 60

CATEGORY	A	B	C	D
LPV DA		679/18	200 (200-1/2)	
LNAV/VNAV DA		901/40	422 (400-3/4)	
LNAV MDA	1000/24	521 (500-1/2)	1000/55	521 (500-1)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1 3/4 659 (700-1 3/4)	1400-3 899 (900-3)