



ILS or LOC RWY 36C
MEMPHIS INTL (MEM)

ALSF-2

MISSED APPROACH: Climb to 3000
via MEM VORTAC R-360 to
LAURI INT/MEM 13.7 DME and hold.

D-ATIS 127.75		1337 Δ	Δ 1450	CLNC DEL 125.2	CPDLC
-------------------------	---	---------------	---------------	--------------------------	-------

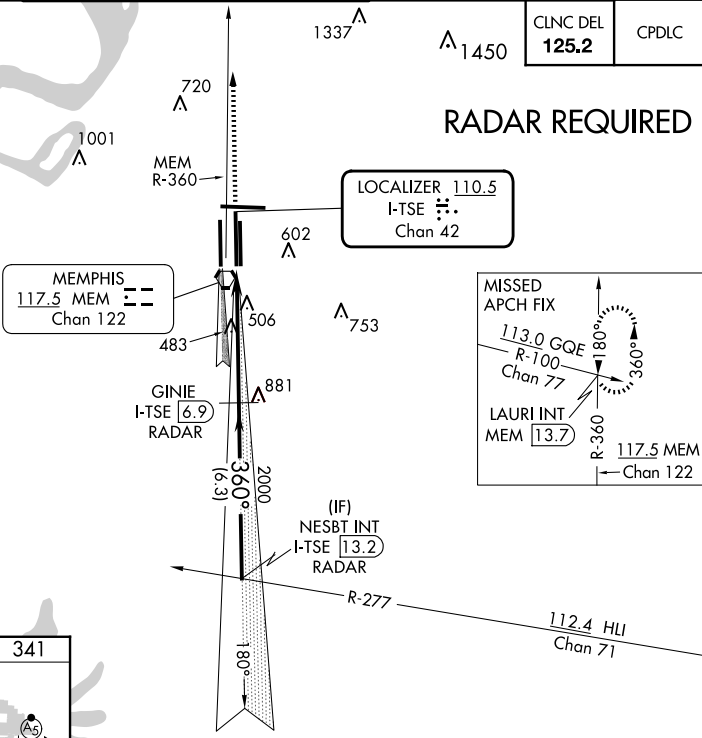

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

Diagram illustrating the LAURI INT approach path. Key features include:

- LAURI INT** and **MEM R-360** (3000) at the start.
- GS 3.00° TCH 60** glide slope.
- GINIE I-TSE [6.9] RADAR** at 2000 feet.
- NESBT INT I-TSE [13.2] RADAR** at 3000 feet.
- Distances:** 1.1 NM, 3.9 NM, 6.3 NM.
- Altitudes:** 2000, 3000.
- Angles:** 360°.

CATEGORY	A	B	C	D	E
S-ILS 36C	541/18 200 (200-½)				541/24 200 (200-½)
S-LOC 36C	760/24 419 (500-½)	760/40 419 (500-¾)		760/50 419 (500-1)	760/50 419 (500-1)
C CIRCLING	940-1 599 (600-1)	940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)	1140-2¾ 799 (800-2¾)

SE-1, 12 JUN 2025 to 10 JUL 2025

SE-1. 12 JUN 2025 to 10 JUL 2025