

WAAS CH 42533 W04A	APP CRS 046°	Rwy Ldg TDZE Apt Elev	5052 295 298
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4




KEY FLD (MEI)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwy's 1 and 22. DME/DME RNP-0.3 NA.

A When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet; increase LPV and LNAV/VNAV all Cat C's visibility ½ mile, LNAV Cats C/D visibility ½ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA with Hattiesburg/Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA.

MISSED APPROACH:
Climb to 1300 then
climbing left turn to
3000 direct PAULD
and hold.

ATIS 126.475 291.675	MERIDIAN APP CON ★ 120.5 269.325	KEY TOWER ★ 133.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.9 348.6	UNICOM 122.95
-------------------------	-------------------------------------	---------------------------------------	------------------------	-------------------------	------------------

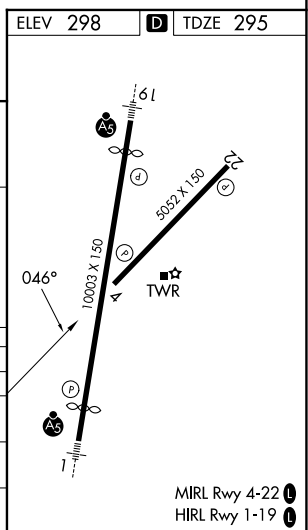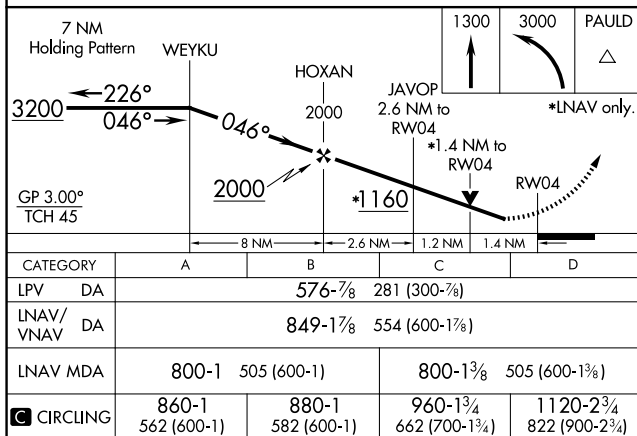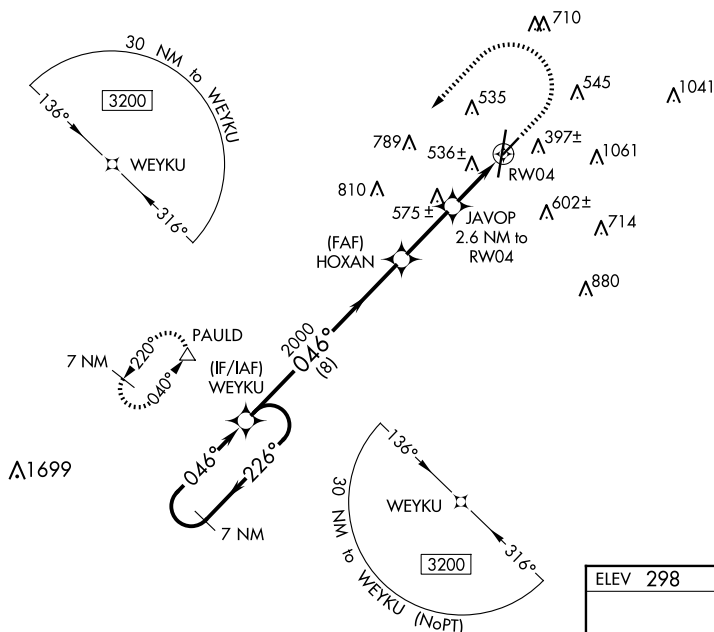

RNAV (GPS) RWY 4