

LOC/DME I-OLX 111.55 Chan 52 (Y)	APP CRS 128°	Rwy Idg TDZE Apt Elev 8	6000 8 8
--	------------------------	--------------------------------------	-------------------------------------

ILS or LOC RWY 12
MIAMI-OPA LOCKA EXEC (OPF')



⚠ Inop table does not apply to S-ILS 12. Helicopter visibility reduction below ¾ SM NA. VDP NA with Miami Intl altimeter setting. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet and Circling Cat D visibility ¼ SM. For inop MALSR, increase S-LOC 12 Cats A and B visibility to 1 mile and Cats C and D visibility to 1½ miles.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on heading 090° and DHP VORTAC R-069 to JANUS INT/DHP 42.5 DME and hold.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
----------------------	---------------------------------------	--	---------------------------	--------------------------	----------------------

RADAR REQUIRED

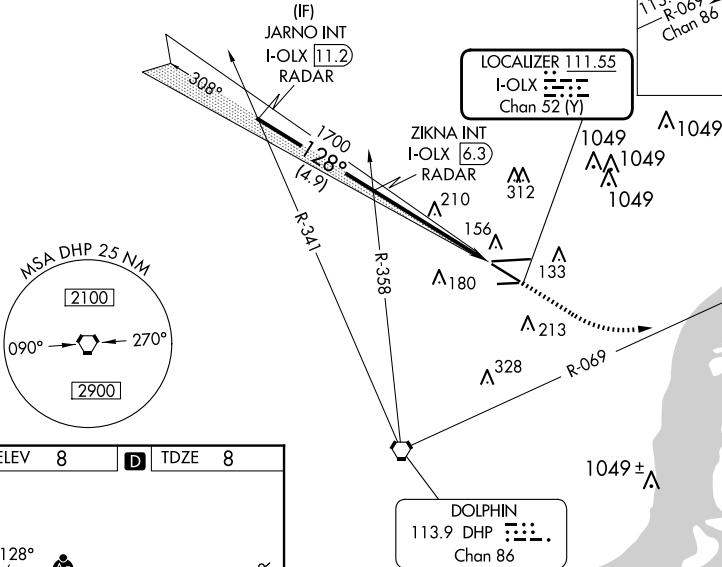

ELEV 8 TDZE 8

MIRL Rwy 9R-27L
HIRL Rwys 9L-27R and 12-30 0
FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

JARNO INT I-OLX <u>11.2</u> RADAR		ZIKNA INT I-OLX <u>6.3</u> RADAR		800 ↑	2000 hdg 090°	DHP R-069	JANUS △
*LOC only.							

SE-3, 12 JUN 2025 to 10 JUL 2025

SE-3, 12 JUN 2025 to 10 JUL 2025