


MIAMI, FLORIDA

MIAMI DEP CON
125.5 354.1 (Dep
119.45 290.325
D-ATIS
133.675
CLINC DEL
135.35
CPDLC
GND CON
(Rwys 8L/R, 12, 20, 22)
(Rwys 9, 27, 30) 1
MIAMI TOWER
118.3 256.9

TOP ALTITUDE:
5000

RNAV-1 DME/DME/IRU or GPS.
RADAR required for NON-GPS en
RADAR required.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: SHQQ and BAGGS transitions ATC assigned except aircraft departing MIA.

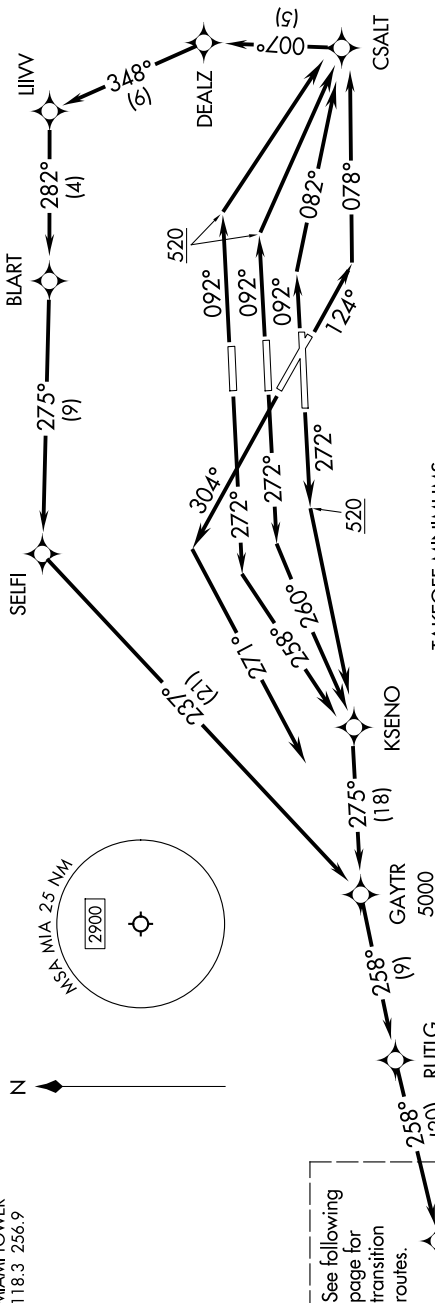

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215'/NM to 1400.

Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235'/NM to 1400.

Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240'/NM to 1400.

Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230'/NM to 1400.

Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 12 JUN 2025 to 10 JUL 2025