


TOP ALTITUDE:
5000

RADAR required for non-GPS equipped aircraft.

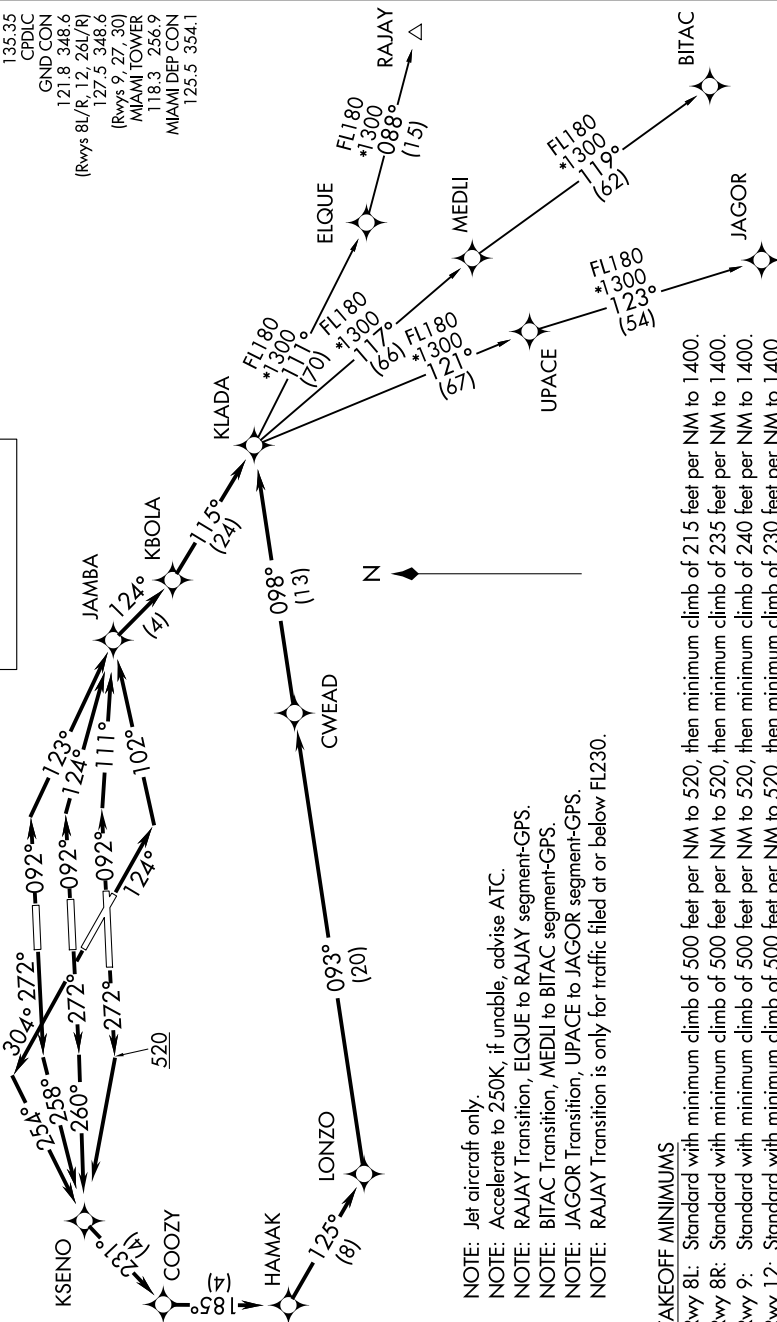

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SE-3, 12 JUN 2025 to 10 JUL 2025

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 215 feet per NM to 1400.

Rwy 8R: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 235 feet per NM to 1400.

Rwy 9: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 240 feet per NM to 1400.

Rwy 12: Standard with minimum climb of 500 feet per NM to 520, then minimum climb of 230 feet per NM to 1400.

Rwy 26L/R, 27, 30: Standard with minimum climb of 500 feet per NM to 520.

KLADA TWO DEPARTURE (RNAV)
(KLADA2.KLADA) 19MAY22

MIAMI, FLORIDA
MIAMI INTL (MIA)