

WAAS CH 69306 W33A	APP CRS 327°	Rwy Idg 8502 TDZE 219 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 33


RNP APCH - GPS.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct SQWID and hold.

ATIS	MOBILE APP CON ★	MOBILE TOWER ★	GND CON	CLNC DEL	UNICOM
124.75 257.85	118.5 269.3	118.3 (CTAF) 0 239.0	121.9 348.6	119.85	122.95

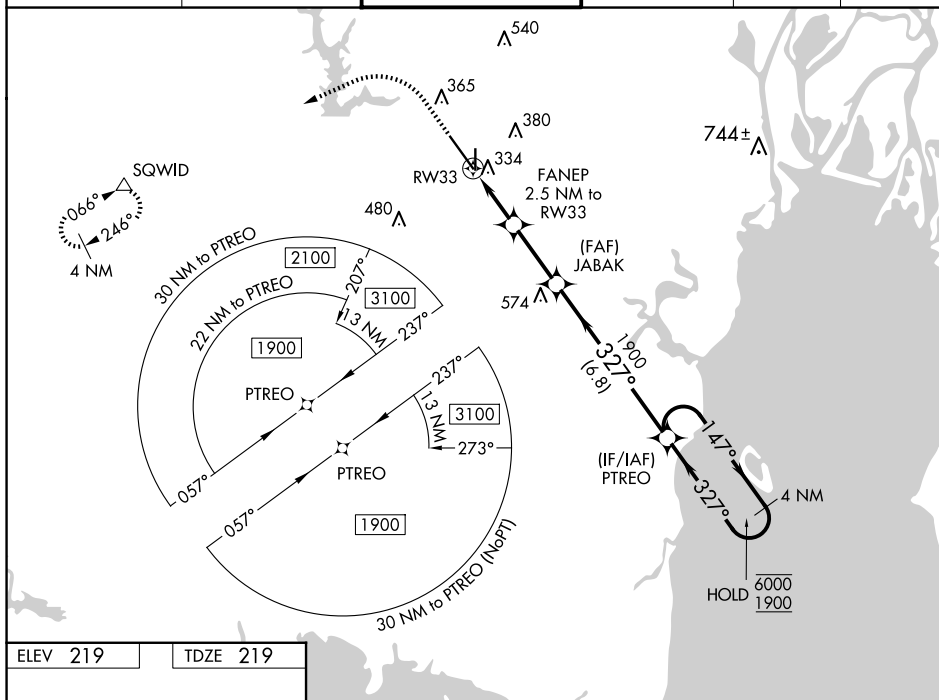

ELEV 219		TDZE 219
----------	--	----------

