

WAAS	APP CRS	Rwy Ldg	9618
CH 70304	320°	TDZE	25
W32A		Apt Elev	26

RNAV (GPS) RWY 32

MOBILE INTL (BFM)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000, and LNAV Cats C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct WORIR and hold.

ATIS 135.575	MOBILE APP CON ★ 118.5 269.3	INTERNATIONAL TOWER ★ 118.8 (CTAF) 0 251.1	GND CON 121.7 239.3	UNICOM 122.95
-----------------	---------------------------------	---	------------------------	------------------

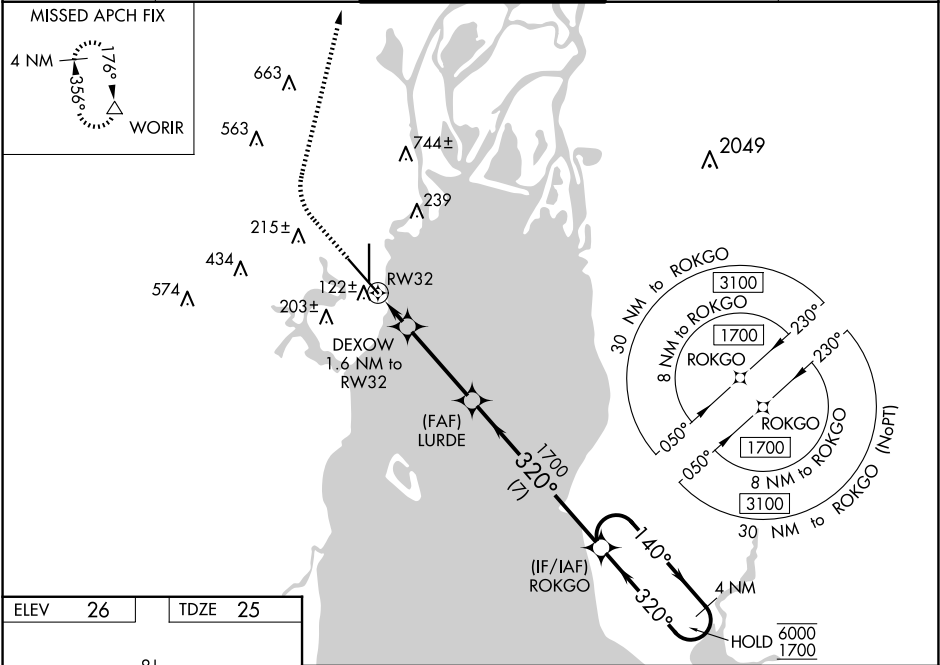

ELEV 26

TDZE 25

800

2000

WORIR

LURDE

DEXOW 1.6 NM to RW32

0.9 NM to RW32

0.7 NM

3.5 NM

7 NM

4 NM Holding Pattern

1700

580

1700

6000

1700

GP 3.00° TCH 55

CATEGORY	A	B	C	D
LPV DA	225/18	200 (200-½)		
LNAV/VNAV DA	283/24	258 (300-½)		
LNAV MDA	380/24	355 (400-½)	380/30	355 (400-¾)
CIRCLING	680-1	654 (700-1)	680-1¾ 654 (700-1¾)	1100-3 1074 (1100-3)