

LOC I-MSL 109.7	APP CRS 297°	Rwy Idg TDZE Apt Elev	6694 551 551
---------------------------	------------------------	-----------------------------	---

ILS Z or LOC Z RWY 30

NORTHWEST ALABAMA RGNL (MSL)

DME required. RADAR required.

▼



▲

DME from MSL DME.
Simultaneous reception of I-MSL and MSL DME required.
For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 020° to intercept RQZ VORTAC R-268 to JOBUM/RQZ VORTAC 42.5 DME/RADAR and hold, continue climb-in-hold to 3000.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

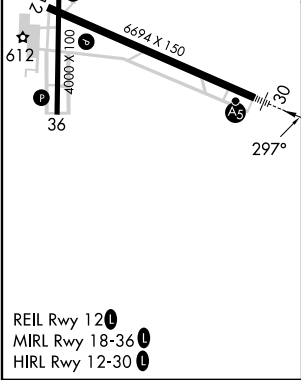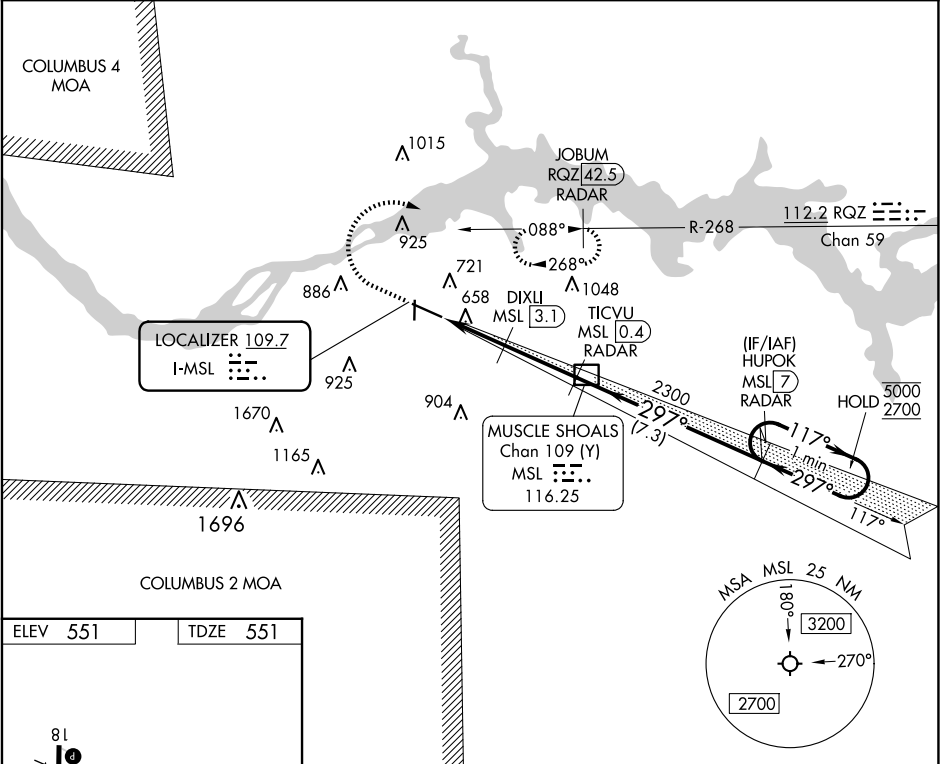

1200	3000	RQZ R-268	JOBUM RQZ 42.5 RADAR	MSL DME	HUPOK MSL 7 RADAR	One Minute Holding Pattern
	hdg 020°		DIXLI MSL 3.1	TICVU MSL 0.4 RADAR		
			MSL 4.6	MSL 5.6		
			1400	2300		
			1 NM	1.5 NM	2.8 NM	7.3 NM
CATEGORY	A	B	C	D		
S-ILS 30		751-1/2	200 (200-1/2)			
S-LOC 30	920-1/2	369 (400-1/2)	920-5/8	369 (400-5/8)		
CIRCLING	1040-1	489 (500-1)	1280-2	1280-2 1/4	729 (800-2)	729 (800-2 1/4)