

WAAS CH 61135 W36A	APP CRS 004°	Rwy Idg 4000 TDZE 547 Apt Elev 551
--	------------------------	---

RNAV (GPS) RWY 36


NORTHWEST ALABAMA RGNL (MSL)

RNP APCH-GPS.

▼ Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct TUBYO and hold.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

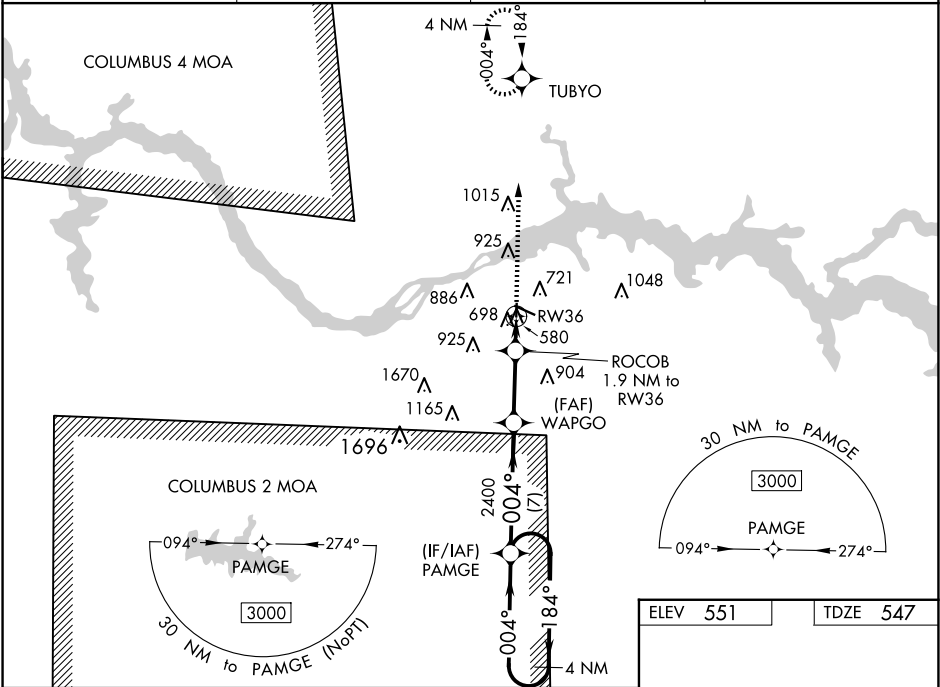

4 NM Holding Pattern PAMGE

3000 ←184° 004°→

GP 3.00° TCH 40

WAPGO 2400

ROCOB 1.9 NM to RW36

*1.2 NM to RW36

*1160

2400

7 NM 3.8 NM 0.7 1.2 NM

CATEGORY	A	B	C	D
LPV DA	797-1 250 (300-1)			
LNAV/VNAV DA	935-1 388 (400-1 3/8)			
LNAV MDA	960-1 413 (500-1)		960-1 413 (500-1 1/8)	
CIRCLING	1040-1 489 (500-1)		1280-2 729 (800-2) 1280-2 729 (800-2 1/4)	

ELEV 551 TDZE 547

3000 TUBYO

*LNAV only.

81 12 612 36 4000 X 150 6694 X 150 130

← 004°

REIL Rwy 12 1 MRL Rwy 18-36 1 HIRL Rwy 12-30 1