

APP CRS	Rwy Ldg	9487
136°	TDZE	567
	Apt Elev	599

RNAV (GPS) RWY 13
NASHVILLE INTL (BNA)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV
A NA below -16°C or above 47°C.

MISSED APPROACH: Climb to 3000 direct ONUGE and hold.

D-ATIS
135.1



NASHVILLE APP CON
118.4 360.7

NASHVILLE TOWER
118.6 257.8


GND CON
121.9 348.6

CLNC DEL
126.05

CPDLC

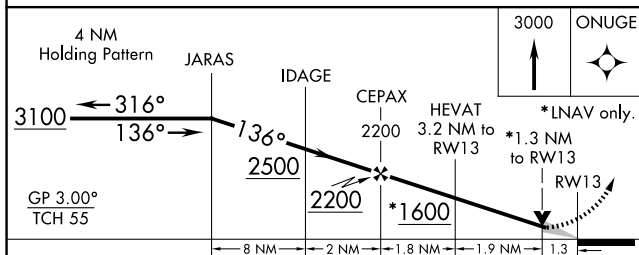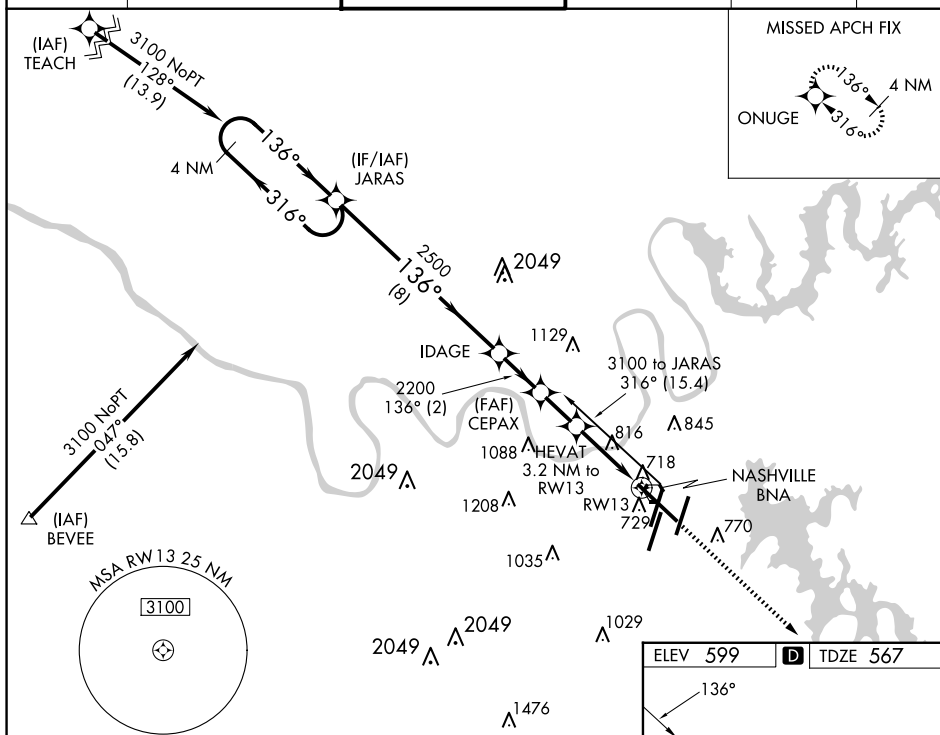

CATEGORY	A	B	C	D
LNNAV/ VNAV DA	968-1½ 401 (400-1½)			
LNNAV MDA	1080-1	513 (500-1)	1080-1½ 513 (500-1½)	1080-1¾ 513 (500-1¾)
C CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)

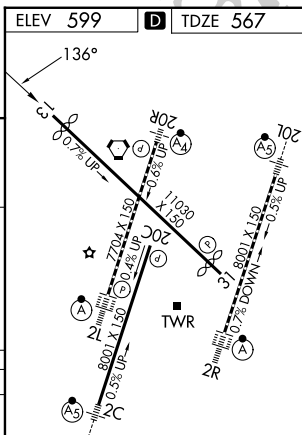

HIRL all Rwy's
TDZ/CL Rwy's 2L and 2R
REIL Rwy's 13, 20C, and 31

NASHVILLE INTL (BNA)
RNAV (GPS) RWY 13