

APP CRS	Rwy Ldg	7702
021°	TDZE	599
	Apt Elev	599

RNAV (RNP) Z RWY 2L

NASHVILLE INTL (BNA)



▼


For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15 all Cats visibility to RVR 4700, increase RNP 0.30 all Cats visibility to 1 ¼ mile. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH:
Climb to 4000 on track 021° to HIKRY and hold, continue climb-in-hold to 4000.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON	CLNC DEL	CPDLC
135.1	118.4 360.7	118.6 257.8	121.9 348.6	126.05	

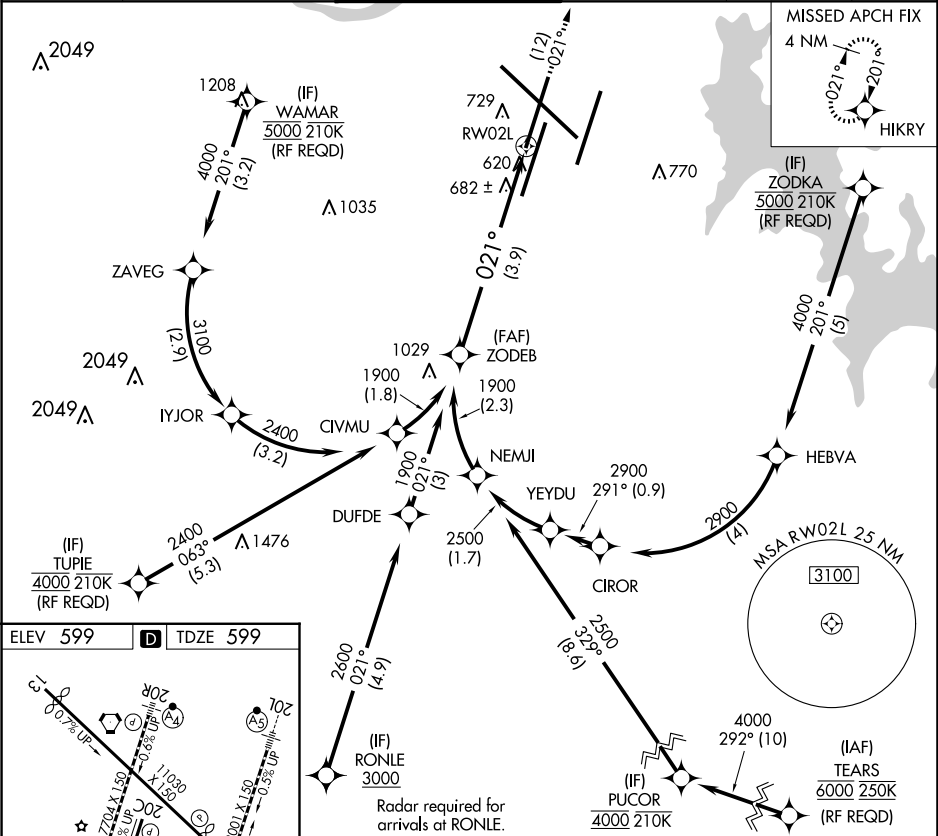

ZODEB 1900 1900 ↗ GP 3.00° TCH 55				See planview for multiple IF locations.		4000 ↑	tr 021°	HIKRY 
021° 3.9 NM				RW02L 				
CATEGORY	A	B	C	D				
RNP 0.15 DA	898/24		299 (300-½)					
RNP 0.30 DA	991/41		392 (400-¾)					
AUTHORIZATION REQUIRED								