


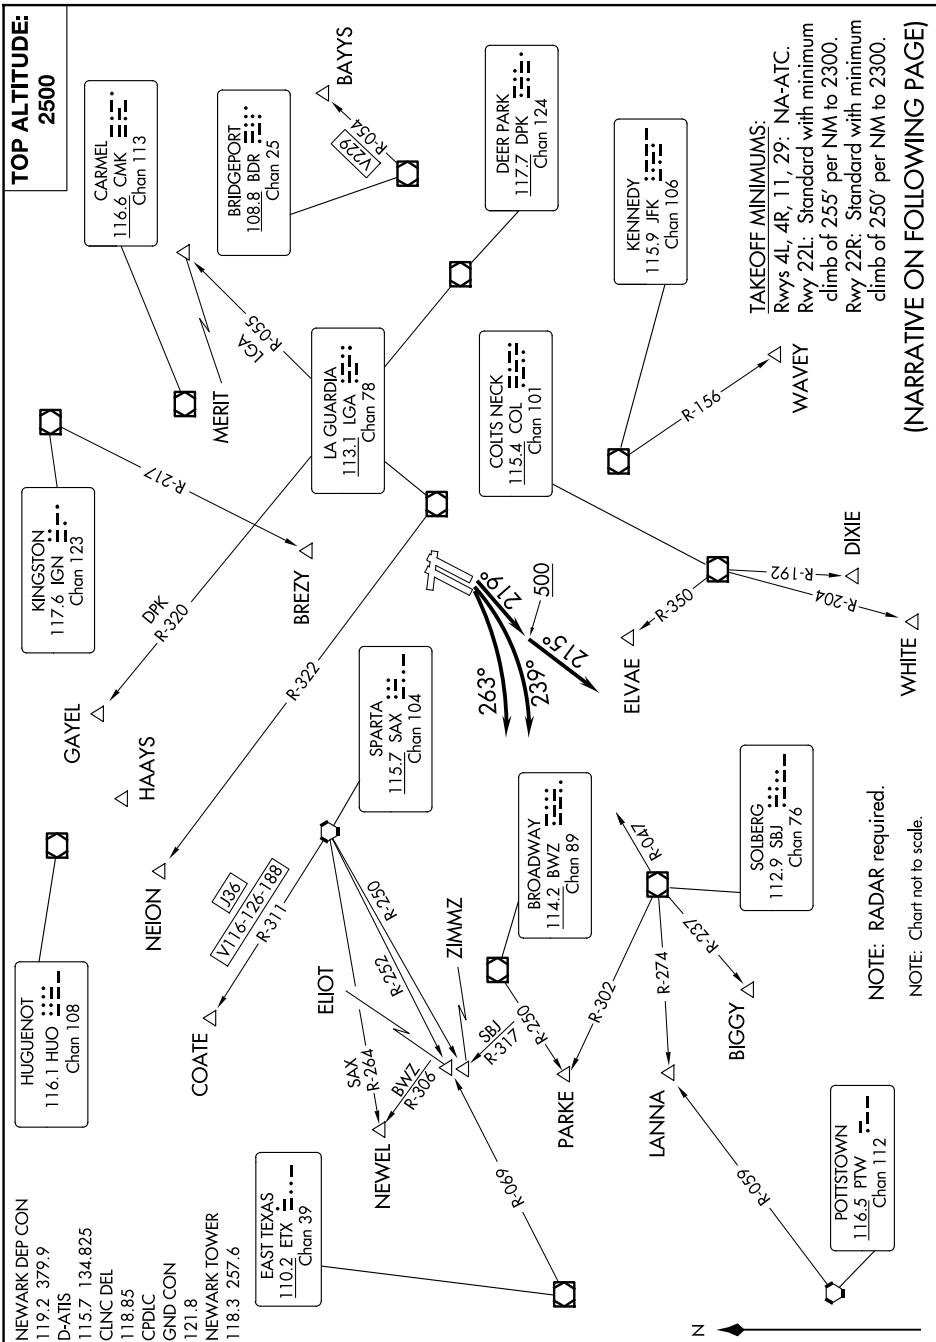

NOTE: RADAR required.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

TAKEOFF MINIMUMS:

Rwys 4L, 4R, 11, 29: NA-ATC.
Rwy 22L: Standard with minimum
climb of 255' per NM to 2300.
Rwy 22R: Standard with minimum
climb of 250' per NM to 2300.