

RNAV (RNP) Z RWY 28R  
OAKLAND INTL (OAK)

|                        |                             |                                     |
|------------------------|-----------------------------|-------------------------------------|
| APP CRS<br><b>278°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5457</b><br><b>7</b><br><b>9</b> |
|------------------------|-----------------------------|-------------------------------------|



RNP AR APCH - GPS. Authorization required.

**T** For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR

**MISSED APPROACH:** Climb to 3000 on 278° track to ZERMO and on 335° track to REBAS and hold.

|                          |                                        |                                                                                                  |                                                                                |                          |       |
|--------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------|-------|
| D-ATIS<br><b>133.775</b> | NORCAL APP CON<br><b>125.35 263.15</b> | OAKLAND TOWER<br><b>118.3 291.65</b> (Rwys 10L/R-28L/R, 15-33)<br><b>127.2 256.9</b> (Rwy 12-30) | GND CON<br><b>121.9</b> (Rwys 10L/R-28L/R, 15-33)<br><b>121.75</b> (Rwy 12-30) | CLNC DEL<br><b>121.1</b> | CPDLC |
|--------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------|-------|

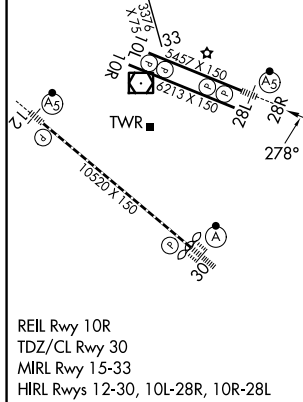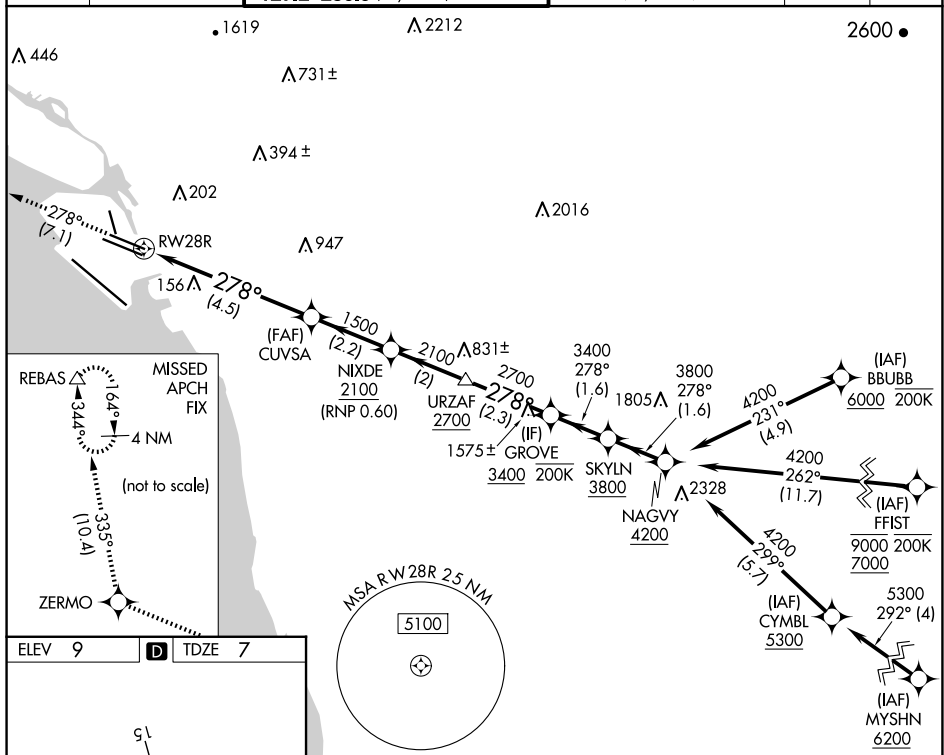

|                        |                       |            |             |  |   |  |   |  |
|------------------------|-----------------------|------------|-------------|--|---|--|---|--|
| 3000<br>↑<br>tr 278°   | ZERMO<br>✦<br>tr 335° | REBAS<br>△ |             |  |   |  |   |  |
| CATEGORY               | A                     |            | B           |  | C |  | D |  |
| RNP 0.10 DA            | 332/26                |            | 325 (400-½) |  |   |  |   |  |
| RNP 0.30 DA            | 418/40                |            | 411 (500-¾) |  |   |  |   |  |
| AUTHORIZATION REQUIRED |                       |            |             |  |   |  |   |  |

## RNAV (RNP) Z RWY 28R