



HI-ILS or LOC/DME RWY 21L

LOC I-EMJ 110.9	APCH CRS 213°	Rwy Idg TDZE Arprt Elev 9912 1084 1084	[USAF]	LUKE AFB (KLUF)
RADAR required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase vis to 1 3/8 miles.			ALSF-1 A1	MISSED APPROACH: Climbing to 5000, intercept LUF TACAN R-213 to 19 DME (CESAT). Contact LUKE APP CON.
ATIS ★ 134.925 269.85	APP CON ★ 118.15 363.125	TOWER ★ 119.1 379.9	GND CON ★ 133.175 335.8	CLNC DEL ★ 126.25 273.475

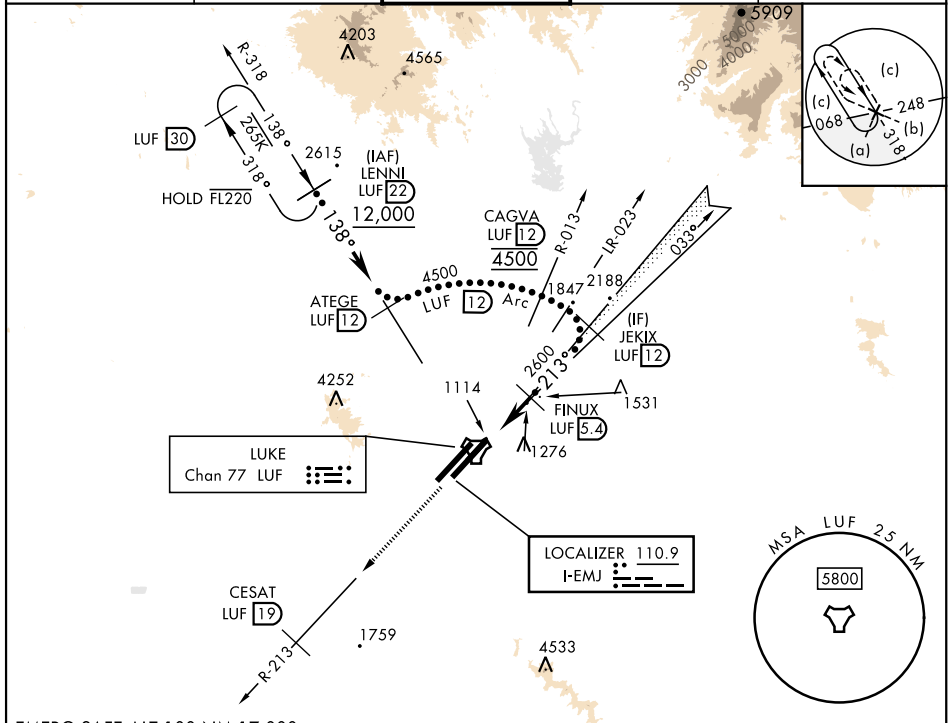

EMERG SAFE ALT 100 NM 17,000

5000 LUF R-213	CESAT LUF 19	FINUX LUF 5.4	JEKIX LUF 12	CAGVA R-013 LUF 12	ATEGE LUF 12	LENNI LUF 22
1.4	2.3	5.4	12	12	12	22
2600	3400	4500	12000	12000	12000	12000
0.6 NM	4.0 NM					
CATEGORY	C	D	E			
S-ILS 21L *	1284-1/2	200	(200-1/2)			
S-LOC/ DME 21L	1600-1	516	(600-1)			
SIDESTEP 21R	1600-2	516	(600-2)			
CIRCLING	NOT AUTHORIZED					

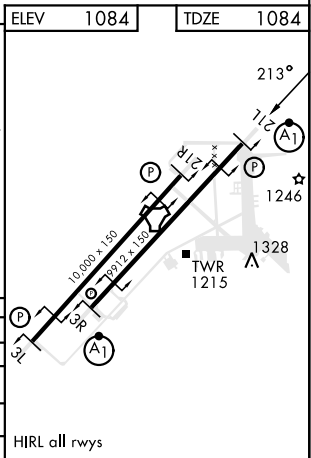

HI-ILS or LOC/DME RWY 21L