

WAAS CH 62810 W02A	APP CRS 019°	Rwy Idg 5503 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 2
SACRAMENTO EXEC (SAC)

RNP APCH-GPS.



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to $\frac{3}{8}$ SM, increase LNAV all Cats visibility to 1 SM.

MALSR




MISSED APPROACH: Climb to 440 then climbing left turn to 2000 direct JIRAG and hold.

ATIS 125.5	NORCAL APP CON 125.25 257.9	EXEC TOWER★ 119.5 (CTAF) 0 278.8	GND CON 125.0	UNICOM 122.95
---------------	--------------------------------	-------------------------------------	------------------	------------------

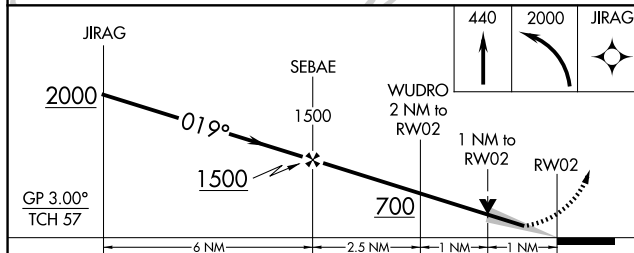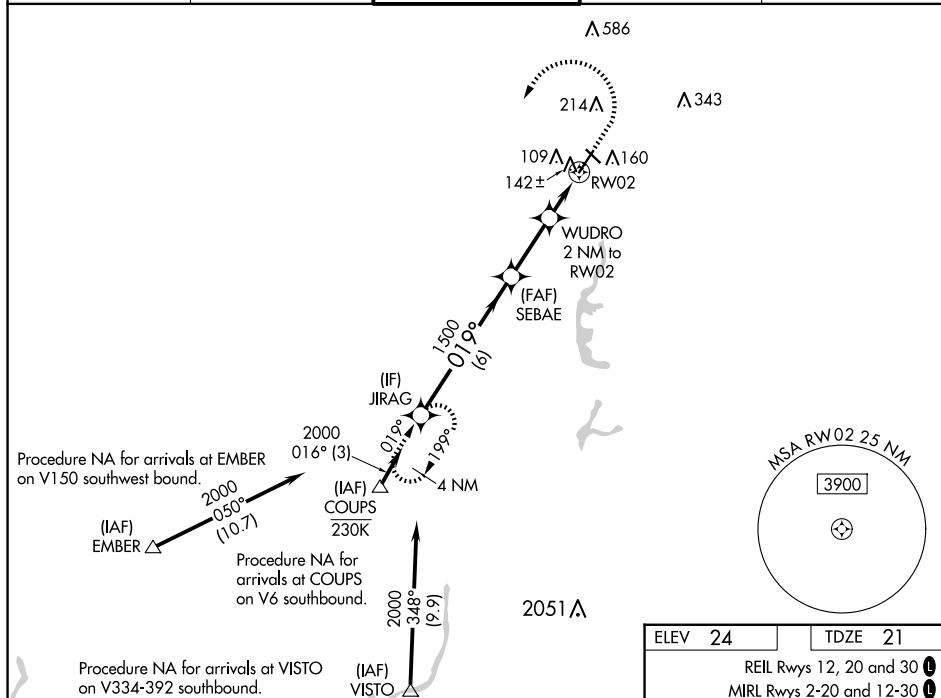

CATEGORY	A	B	C	D
LPV DA	221-½ 200 (200-½)			
LNAV/ VNAV DA	304-½ 283 (300-½)			
LNAV MDA	400-½ 379 (400-½)		400-⅝ 379 (400-⅝)	
 CIRCLING	500-1 476 (500-1)	520-1 496 (500-1)	560-1½ 536 (600-1½)	800-2½ 776 (800-2½)

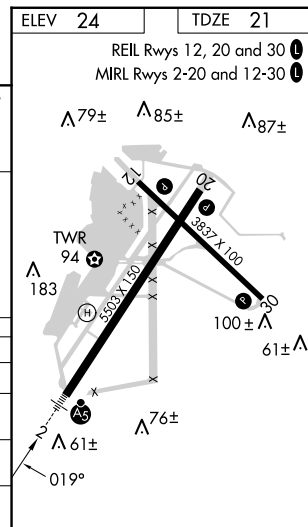

SW-2, 12 JUN 2025 to 10 JUL 2025