



WAAS CH 77819 W35A	APP CRS 356°	Rwy Ldg 8061 TDZE 815 Apt Elev 827
--	------------------------	---

RNAV (GPS) RWY 35
ROSECRANS MEML (STJ)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Kansas City Intl altimeter setting. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV all Cats visibility to RVR 5000, and LNAV/VNAV all Cats visibility to 1¼ mile; increase all MDA 100 feet, and increase LNAV Cat C/D/E visibility ¼ mile, and Circling Cat C ½ mile, Cat D ½ mile.

MISSED APPROACH:
Climb to 3000 direct TOCDU and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9(CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

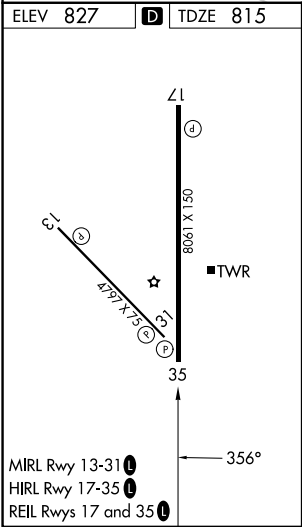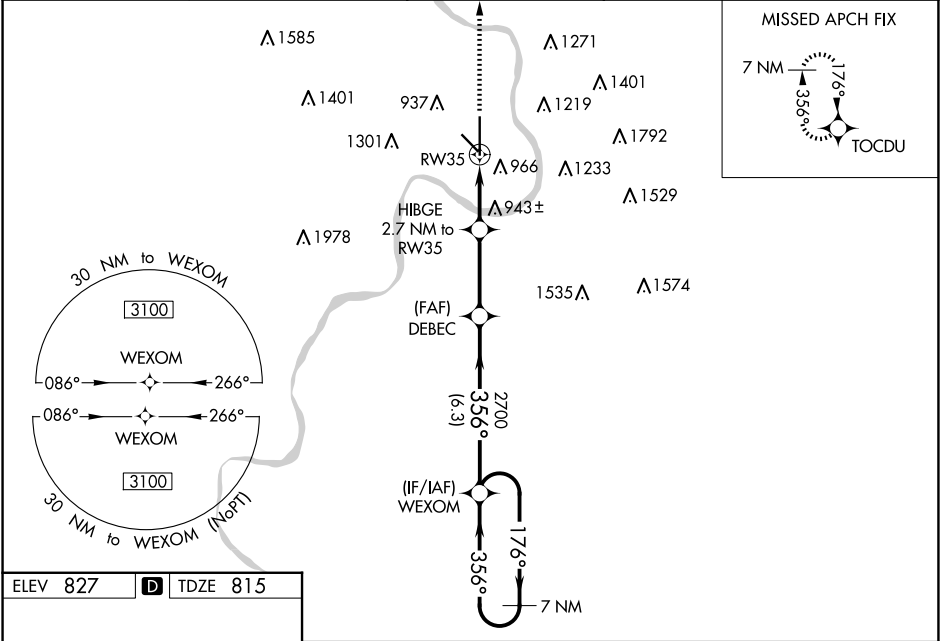

3000 TOCDU	VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 64).				
*LNAV only.	HIBGE 2.7 NM to RW35	DEBEC 2700	WEXOM 7 NM Holding Pattern	3100	
	1.1 NM to RW35	1720	356°	176°	
	1.1 NM	1.6 NM	3.1 NM	6.3 NM	
CATEGORY	A	B	C	D	E
LPV DA	1015/40 200 (200-¾)				
LNAV/VNAV DA	1096/45 281 (300-¾)				
LNAV MDA	1200/55 385 (400-1)	1200/60 385 (400-1¼)			
C CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2¼ 793 (800-2¼)	1640-2¾ 813 (900-2¾)	1760-3 933 (1000-3)

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025