


NC-3, 12 JUN 2025 to 10 JUL 2025

TOP ALTITUDE:
(JETS) 5000/
(PROPS) 3000

D-ATIS 125.025 379.925
CLNC DEL 119.5 363.1
CPDIC
GND CON 121.9 348.6 (Inbound)
121.65 377.175 (Outbound)
118.925 227.125 (Rwy 11/29)
ST. LOUIS TOWER 120.05 284.6 (Rwys 12L/30R, 24)
118.5 257.7 (Rwy 12R/30L)
132.475 239.275 (Rwys 6, 11/29)
ST. LOUIS DEP CON 119.15 335.5

NOTE: RADAR required.
NOTE: BRICKYARD transition, CREEP transition, and
ROSEWOOD transition: DME required.

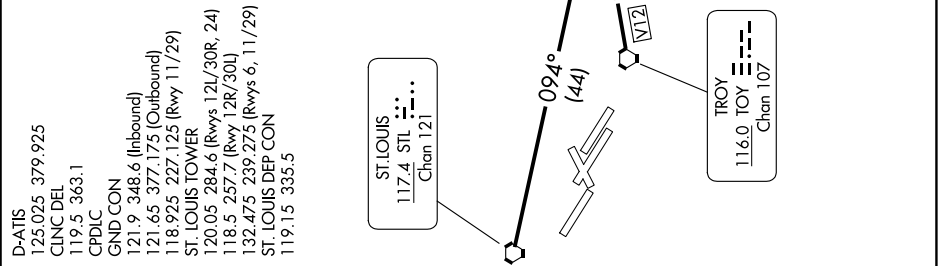

TAKEOFF MINIMUMS
Rwys 6, 12L/R, 24, 29: Standard.
Rwy 11: 200-1 or standard with minimum climb of 370' per NM to 900.
Rwy 30L: 200-1 or standard with minimum climb of 245' per NM to 800.
Rwy 30R: 200-1 3/4 or standard with minimum climb of 230' per NM to 800.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

NC-3, 12 JUN 2025 to 10 JUL 2025