


WAAS CH 49237 W09A	APP CRS 095°	Rwy Ldg 7280 TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) RWY 9
SAN DIEGO INTL (SAN)

RNP APCH. ▼ ▲ Circling NA north of Rwy 9-27. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 47°C. When Circling to Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 9 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats A/B visibility to RVR 5500.	MALS R ▲ S	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct CAPUS and hold.
--	------------------	--

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (WEST) 124.35 279.625 (EAST)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9	CLNC DEL 125.9	CPDLC
------------------------	--	---	-------------------------	--------------------------	-------

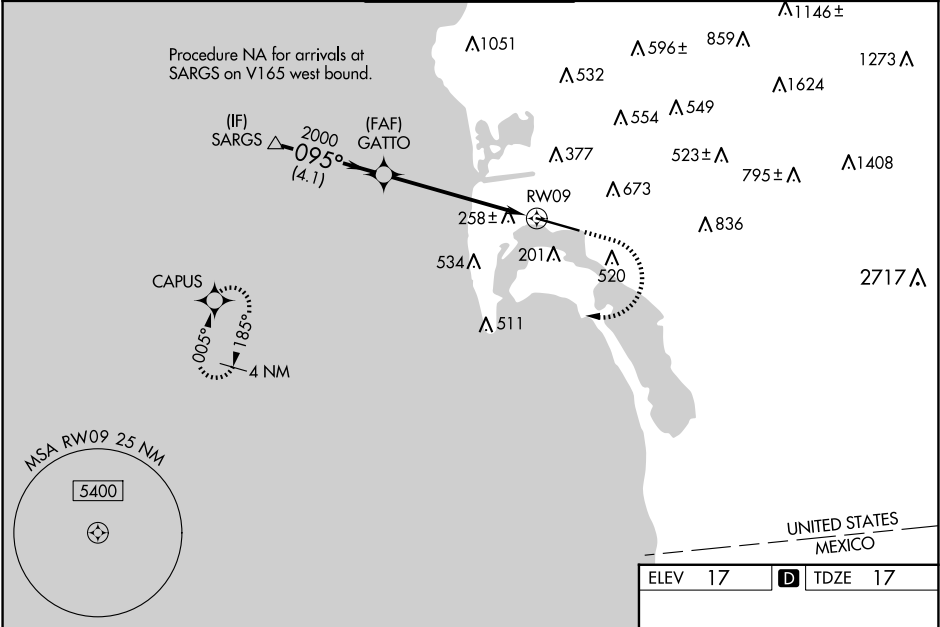

VGSI and RNAV glidepath not coincident (VGSI Angle 3.30/TCH 76).					2000	3000	CAPUS
SARGS					*LNNAV only.		
2100					095°		
GP 3.10°					2000		
TCH 55					4.1 NM		
GATTO					4.3 NM		
2000					1.6 NM		
RWY 09					*1.6 NM to RWY 09		
CATEGORY	A	B	C	D	TWR		
LPV DA		262/40	245 (300-¾)		9401 X 200		
LNAV/VNAV DA		621-1½	604 (700-1½)		HIRL Rwy 9-27		
LNAV MDA	600/40	583 (600-¾)	600-1¼	583 (600-1¼)	TDZ/CL Rwy 9 and 27		
CIRCLING	800-1 783 (800-1)	820-1 803 (900-1)	820-2¼ 803 (900-2¼)	940-3 923 (1000-3)			

SW-3, 12 JUN 2025 to 10 JUL 2025

SW-3, 12 JUN 2025 to 10 JUL 2025