


WAAS CH 57911 W13A	APP CRS 133°	Rwy Idg TDZE 1095 Apt Elev 1098
--	------------------------	---

RNAV (GPS) RWY 13


SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUx)

RNP APCH-GPS. ▼ ▲ Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cat E visibility to 1½ SM.	MALS ⬤ ⬤ ⬤	MISSED APPROACH: Climb to 3900 direct WAVUK and hold.
---	---	---

ATIS 119.45 270.8	SIoux CITY APP CON ★ 124.6 307.0	SIoux CITY TOWER ★ 118.7 (CTAF) 0 254.3	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	---	-------------------------------	-------------------------

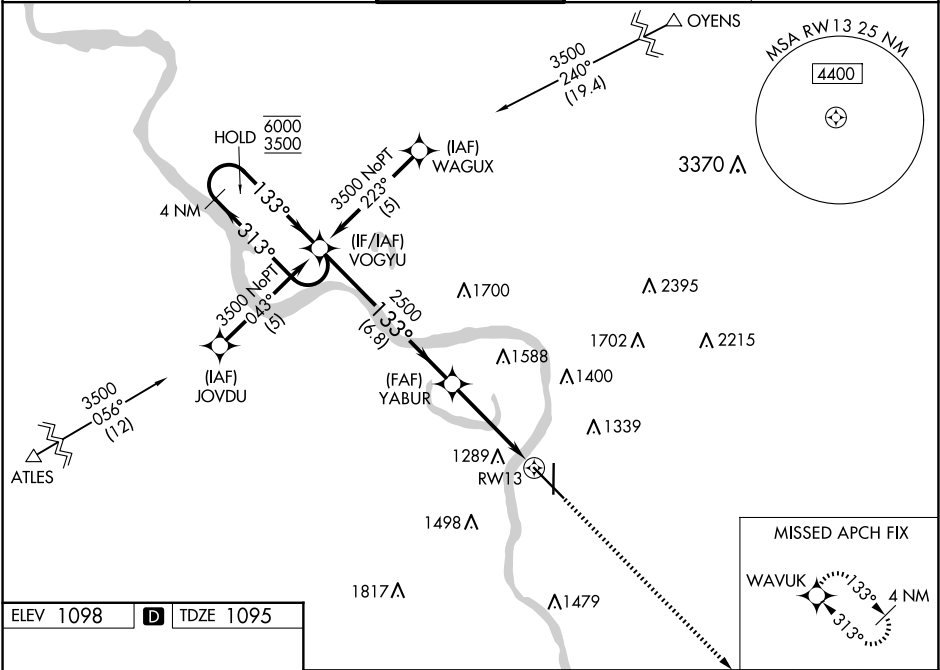

ELEV 1098	D	TDZE 1095
-----------	---	-----------

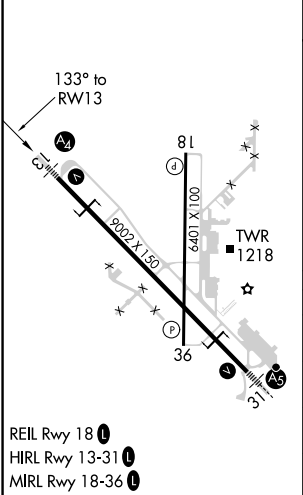

- REIL Rwy 18 1
- HIRL Rwy 13-31 1
- MIRL Rwy 18-36 1

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).					3900	WAVUK
4 NM Holding Pattern					↑	✦
6000 ← 313° 3500 → 133°					*LNAV only.	
GP 3.00° TCH 54					*1.5 NM to RW13	
VOGYU					RW13	
YABUR					2500	
6.8 NM					2.7 NM	
1.5 NM						
CATEGORY	A	B	C	D	E	
LPV DA	1295/40 200 (200-¾)					
LNAV/VNAV DA	1582/60 487 (500-1¼)					
LNAV MDA	1620/40 525 (600-¾)		1620-1¼ 525 (600-1¼)			
CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1¼ 602 (700-1¼)	1860-2½ 762 (800-2½)	2000-3 902 (1000-3)	

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025