

WAAS CH 93504 W18A	APP CRS 180°	Rwy Idg 10000 TDZE 641 Apt Elev 678
--	------------------------	--

RNAV (GPS) RWY 18L

TULSA INTL (TUL)

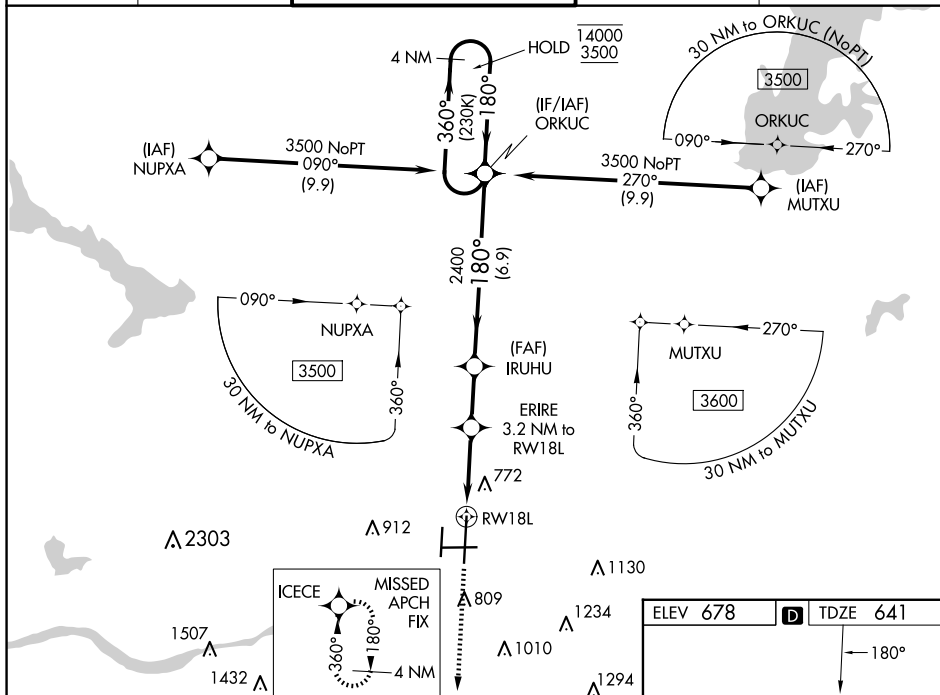
RNP APCH - GPS.

T Circling NA for Cat E south of Rwy 8-26. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat E visibility to 1¼ SM. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.

MALSR

MISSED APPROACH:
Climb to 3500 direct
ICECE and hold.

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (Rwys 18L-36R, 8-26) 118.7 257.8 (Rwys 18R-36L)	GND CON 121.9 348.6	CLNC DEL 134.05 284.7
------------------------------	-------------------------------------	---	-------------------------------	---------------------------------

[illegible]

CATEGORY		A	B	C	D	E
LPV	DA	841/24		200 (200-½)		
LNAV	DA	983/30		342 (400-¾)		
VNAV	MDA	1080/24 439 (500-½)		1080/40 439 (500-¾)		
 CIRCLING		1120-1 442 (500-1)	1160-1 482 (500-1)	1500-2½ 822 (900-2½)	1520-2¾ 842 (900-2¾)	1520-3 842 (900-3)

