

WAAS CH 86245 W13A	APP CRS 128°	Rwy Ldg 9111 TDZE 115 Apt Elev 115
--	------------------------	---

RNAV (GPS) RWY 13

VICTORIA RGNL (VCT)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat E visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2200 direct
SEYOG and hold.

ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 257.95	GND CON 120.525 239.25	UNICOM 122.7
------------------------	---------------------------------------	--	----------------------------------	------------------------

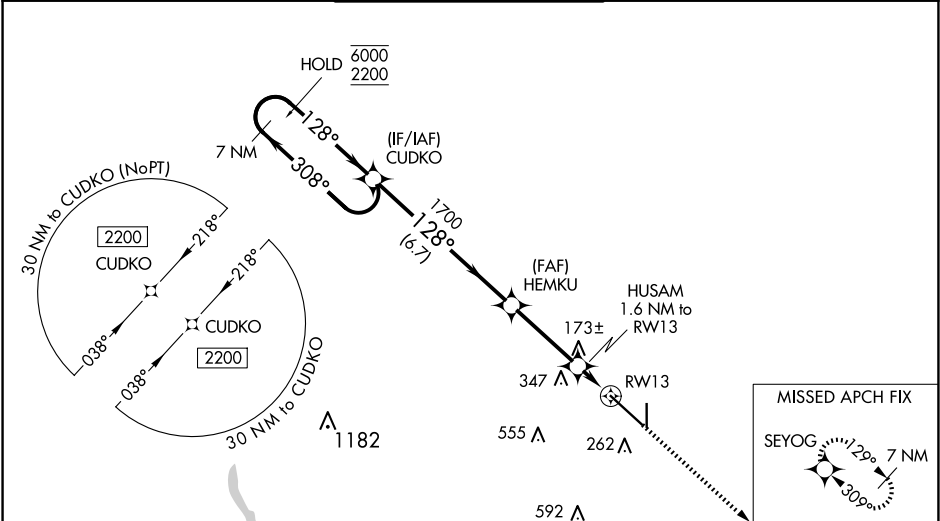

7 NM Holding Pattern 6000 2200 GP 3.00° TCH 53 CUDKO HEMKU HUSAM 1.6 NM to RW13 0.9 NM to RW13 RW13 2200 SEYOG 128° 128° 1700 660 6.7 NM 3.2 NM 0.7 0.9 NM						ELEV 115 D TDZE 115 128° A5 911 X 150 TWR 81 4908 X 75 36 MIRL Rwy 18-36 REIL Rwy 18 and 36 HIRL Rwy 13-31	
CATEGORY	A	B	C	D	E		
LPV DA	315-½ 200 (200-½)						
LNAV/VNAV DA	365-½ 250 (300-½)						
LNAV MDA	440-½ 325 (400-½)						
CIRCLING	580-1	465 (500-1)	820-2 705 (800-2)	880-2 ½ 765 (800-2 ½)	NA		