

LOC/DME I-DCA 109.9 Chan 36	APP CRS 007°	Rwy Ldg 6869 TDZE 14 Apt Elev 14
---	------------------------	---

ILS or LOC RWY 1
RONALD REAGAN WASHINGTON NTL (DCA)

DME required. RADAR required for procedure entry.


T Circling NA northeast of Rwy 15-33.
A For inop ALS, increase S-LOC 1 Cats C and D visibility to 1 $\frac{3}{8}$ SM.

ALSF-2



MISSED APPROACH: Climb to 420 then climbing left turn to 2200 on DCA VOR/DME R-325 to GTN NDB/INT/DCA 5.9 DME and hold.

D-ATIS 132.65	POTOMAC APP CON 119.85 239.25 (WEST/SOUTH) 124.2 360.8 (EAST)	WASHINGTON TOWER 119.1 257.6	GND CON 121.7 257.6	CLNC DEL 128.25	CPDLC
-------------------------	---	--	-------------------------------	---------------------------	-------

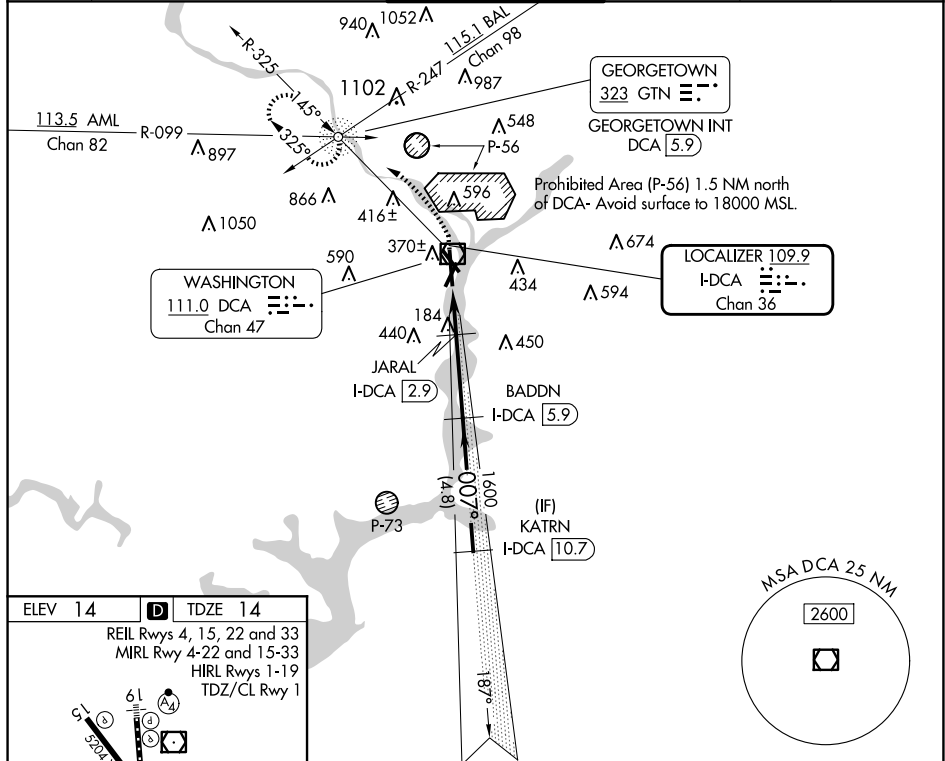

ELEV 14

REIL Rwy 4, 15, 22 and 33
MIRL Rwy 4-22 and 15-33
HIRL Rwys 1-19
TDZ/CL Rwy 1

TWR

5204 X 150
7167 X 150
5000
051 X 150

007°

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

420 ↑	2200 DCA R-325	GTN 	Use I-DCA DME when on the localizer course.			
CATEGORY	A		B		C	D
S-ILS 1	214/18 200 (200-½)					
S-LOC 1	480/24	466 (500-½)		480/50	466 (500-1)	
C CIRCLING	720-1 706 (800-1)	900-1¼ 886 (900-1¼)	900-2¾ 886 (900-2¾)	900-3 886 (900-3)		