

WAAS CH 65815 W01A	APP CRS 015°	Rwy Idg 7012 TDZE 76 Apt Elev 80
--	------------------------	---

RNAV (GPS) RWY 1
NEW CASTLE (ILG)


▼ Inoperative table does not apply to LPV all Cats and LNAV Cats A and B.
▲ Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).
 DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 380, LNAV/VNAV DA to 579, and all MDAs 60 feet; increase LNAV/VNAV all Cats visibility to RVR 6000 and Circling Cat D visibility $\frac{1}{4}$ SM. For inoperative MALSR, increase LNAV Cats C and D visibility $\frac{1}{4}$ mile. For inoperative MALSR, when using Philadelphia Intl altimeter setting, increase LNAV visibility Cat C $\frac{1}{4}$ mile.

MALSR



MISSED APPROACH:
Climb to 2000 direct
CUBBE and left turn
via track 265° to
TENPY and via track
214° to ELUDE and
hold.

ATIS 123.95	PHILADELPHIA APP CON 118.35 323.1	WILMINGTON TOWER ★ 126.0 (CTAF) 352.05	GND CON 121.7 275.8	CLNC DEL 119.95	UNICOM 122.95
----------------	--------------------------------------	---	------------------------	--------------------	------------------

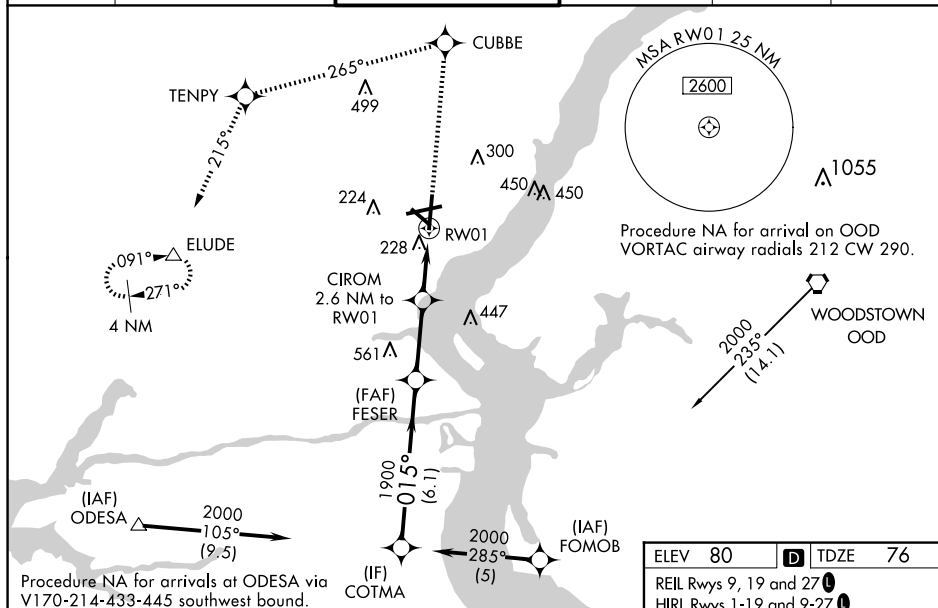

Procedure Turn NA

GP 3.00°
TCH 52

COTMA

2000

015°

FESER

1900

CIROM

2.6 NM to RW01

*960

RW01

6.1 NM

2.9 NM

2.6 NM

*LNAV only

2000

CUBBE

tr 265°

TENPY

tr 214°

ELUDE

