

WAAS CH 93831 W13A	APP CRS 132°	Rwy Idg TDZE Apt Elev	5003 2822 2822
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13
WINKLER COUNTY (INK)


RNP APCH - GPS.

⚠

Baro-VNAV NA when using Pecos altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Pecos altimeter setting. Rwy 13 helicopter visibilities reduction below ¾ SM NA. When local altimeter setting not received, use Pecos altimeter setting: increase LPV DA to 3167 feet and all Cats visibilities ¼ SM; increase LNAV/VNAV DA to 3167 feet and all Cats visibilities ¼ SM; increase all MDAs 100 feet and LNAV Cat C visibility ¾ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 5000 direct BORTY and hold.

ASOS 118.325	FORT WORTH CENTER 133.1 298.95	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

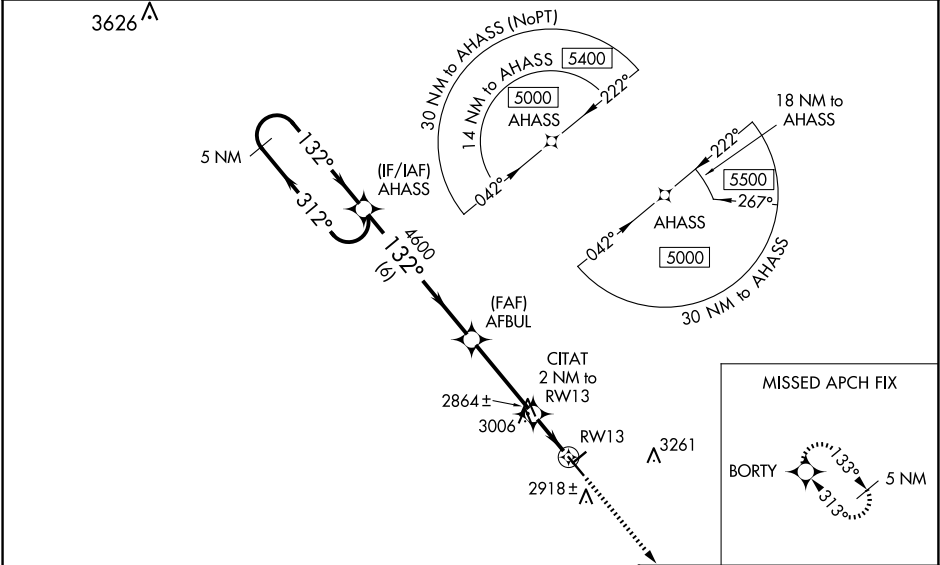

5 NM Holding Pattern AHASS

5000 ← 312°
132° →

GP 3.00°
TCH 45

AFBUL 4600

CITAT 2 NM to RWY 13

0.8 NM to RWY 13

6 NM 3.4 NM 1.2 NM 0.8

ELEV 2822 TDZE 2822

5000 BORTY

132°

3514 X 100

5003 X 100

31

CATEGORY	A	B	C	D
LPV DA	3072-¾	250 (300-¾)		NA
LNAV/VNAV DA	3072-¾	250 (300-¾)		NA
LNAV MDA	3320-1	498 (500-1)	3320-1⅜ 498 (500-1⅜)	NA
CIRCLING	3320-1	498 (500-1)	3580-2¼ 758 (800-2¼)	NA

MIRL Rwy 4-22 and 13-31 0

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025