

WAAS CH 58006 W12A	APP CRS 121°	Rwy Idg TDZE Apt Elev	7504 402 410
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 12

TRI-CITIES (PSC)


⚠ Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities ½ mile; LNAV/VNAV all Cats visibilities ⅓ mile; increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH:
Climb to 900 then climbing left turn to 3200 direct CITYS and hold.

ATIS 125.65	SPOKANE APP CON * 128.75 377.2	TRI-CITIES TOWER * 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

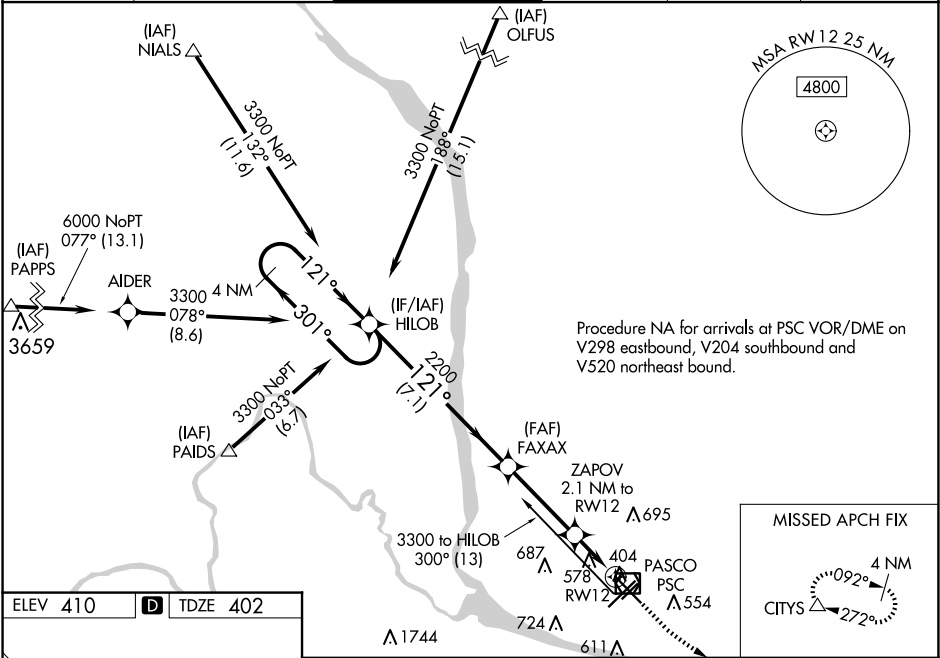

ELEV 410	D	TDZE 402
----------	----------	----------



REIL Rwy 3L and 12
MIRL Rwy 12-30 **0**
HIRL Rwy 3L-21R **0**

CATEGORY	A		B		C		D	
LPV DA	602-¾ 200 (200-¾)							
LNAV/ VNAV DA	755-1½ 353 (400-1½)							
LNAV MDA	840-1 438 (500-1)				840-1¾ 438 (500-1¾)			
CIRCLING	880-1 470 (500-1)		940-1 530 (600-1)		1040-1¾ 630 (700-1¾)		1100-2¼ 690 (700-2¼)	

NW-1, 12 JUN 2025 to 10 JUL 2025

NW-1, 12 JUN 2025 to 10 JUL 2025