


LOC/DME I-ALI 109.3 Chan 30	APP CRS 308°	Rwy Idg TDZE Apt Elev	5997 174 178
---	------------------------	-----------------------------	---


LOC/DME RWY 31
ALICE INTL (ALI)


RADAR required for procedure entry from Corpus Christi CRP VORTAC.		MALS	MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 on direct ALI VOR and hold.
VDP NA when using Nueces County altimeter setting. When local altimeter setting not received, use Nueces County altimeter setting and increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Nueces County altimeter setting, increase S-31 Cats C, D visibility to 1½ SM.			

ASOS 119.225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

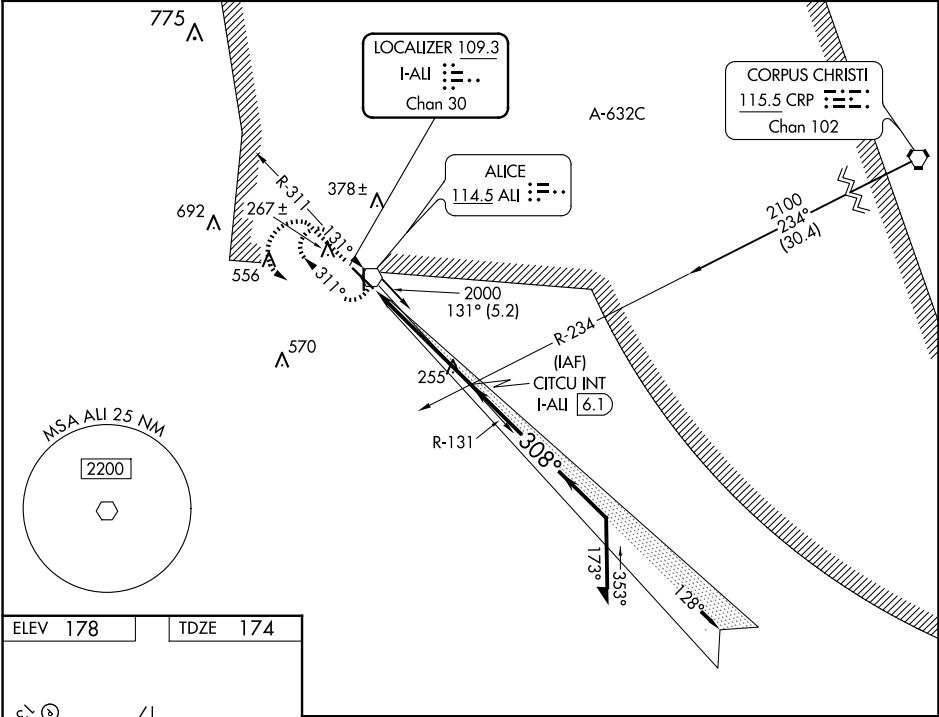

ELEV 178	TDZE 174
-----------------	-----------------

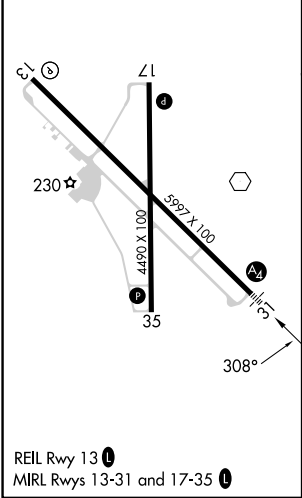

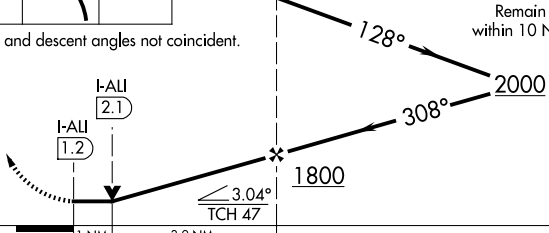1500	2000	ALI	2000	CITCU INT I-ALI [6.1]	128°	Remain within 10 NM
						
VGSI and descent angles not coincident.						
						
CATEGORY	A	B	C	D		
S-31	520-¾ 346 (400-¾)					
CIRCLING	600-1 422 (500-1)	640-1 462 (500-1)	700-1½ 522 (600-1½)	900-2¼ 722 (800-2¼)		