

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>86210</b><br><b>W05A</b> | APP CRS<br><b>053°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5590</b><br><b>5498</b><br><b>5507</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 5

FOUR CORNERS RGNL (FMN)


RNP APCH-GPS.

▼

Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5993 feet and LNAV/VNAV DA to 6163 and all visibilities ¾ SM; increase all MDAs 260 feet and visibility LNAV Cat B/C/D and Circling Cat A/B/C ¾ SM.

MISSED APPROACH:  
Climb to 8400 direct  
DIYEP and hold.

|                       |                                       |                                                  |                         |                         |
|-----------------------|---------------------------------------|--------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>127.15</b> | DENVER CENTER<br><b>118.575 348.7</b> | FARMINGTON TOWER★<br><b>118.9 (CTAF) 0 257.8</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------|--------------------------------------------------|-------------------------|-------------------------|

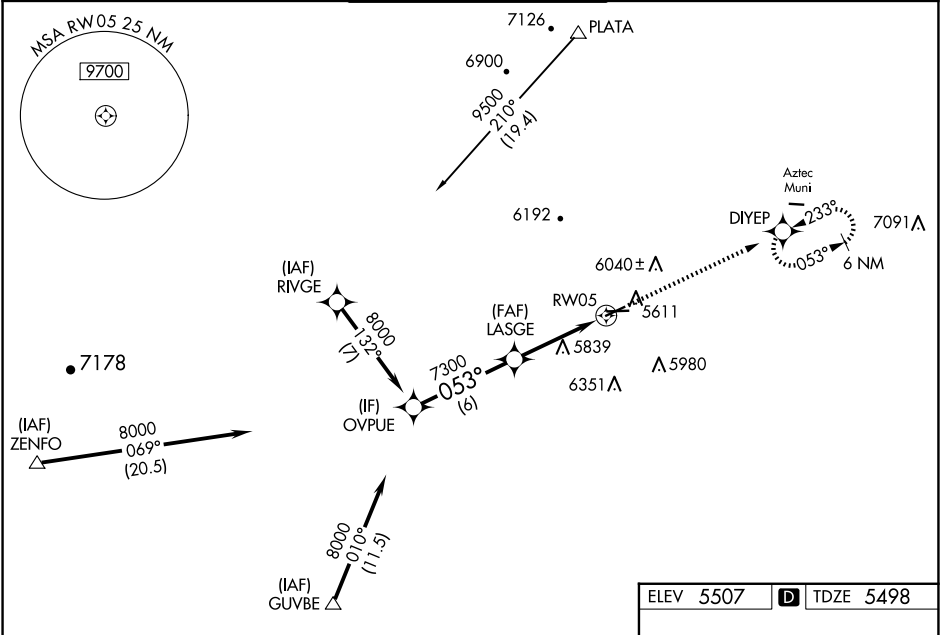

Procedure Turn NA

GP 3.00° TCH 55

8400

DIYEP

\*LNAV only

1.8 NM to RW05

6 NM

3.7 NM

1.8 NM

053°

053°

0.4% UP

0.5% UP

6501 X 150

6704 X 100

TWR

REIL Rwy 23 and 25

MIRL Rwy 5-23 and 7-25

| CATEGORY     | A                     | B                     | C                       | D                      |
|--------------|-----------------------|-----------------------|-------------------------|------------------------|
| LPV DA       |                       | 5750-¾                | 252 (300-¾)             |                        |
| LNAV/VNAV DA |                       | 5920-1¼               | 422 (500-1¼)            |                        |
| LNAV MDA     | 6100-1                | 602 (600-1)           | 6100-1¾                 | 602 (600-1¾)           |
| CIRCLING     | 6100-1<br>593 (600-1) | 6180-1<br>673 (700-1) | 6380-2½<br>873 (900-2½) | 6460-3<br>953 (1000-3) |

SW-1, 12 JUN 2025 to 10 JUL 2025

SW-1, 12 JUN 2025 to 10 JUL 2025