

MAYNR THREE DEPARTURE (RNAV)

**TOP ALTITUDE:
ASSIGNED BY ATC**

RNAV 1 - DME/DME/IRU or GPS.

From SLIPT to MAXIM: RNAV 1 - GPS.

From SLIPT to CANOA: RNAV 1- GPS.

RADAR required for non-GPS equipped aircraft.

RADAR required.


MIAMI DEP CON	125.5	354.1
ATIS ★	132.275	269.9
CLINC DEL	121.75	275.8
GND CON	121.75	275.8
HOMESTEAD TOW	133.45	279.55

TAKEOFF MINIMUMS

Rwy 6: Standard with minimum climb of 500'/NM to 1800.

Rwy 24: Standard with minimum climb of 500'/NM to 2200.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000,
if unable, advise ATC.

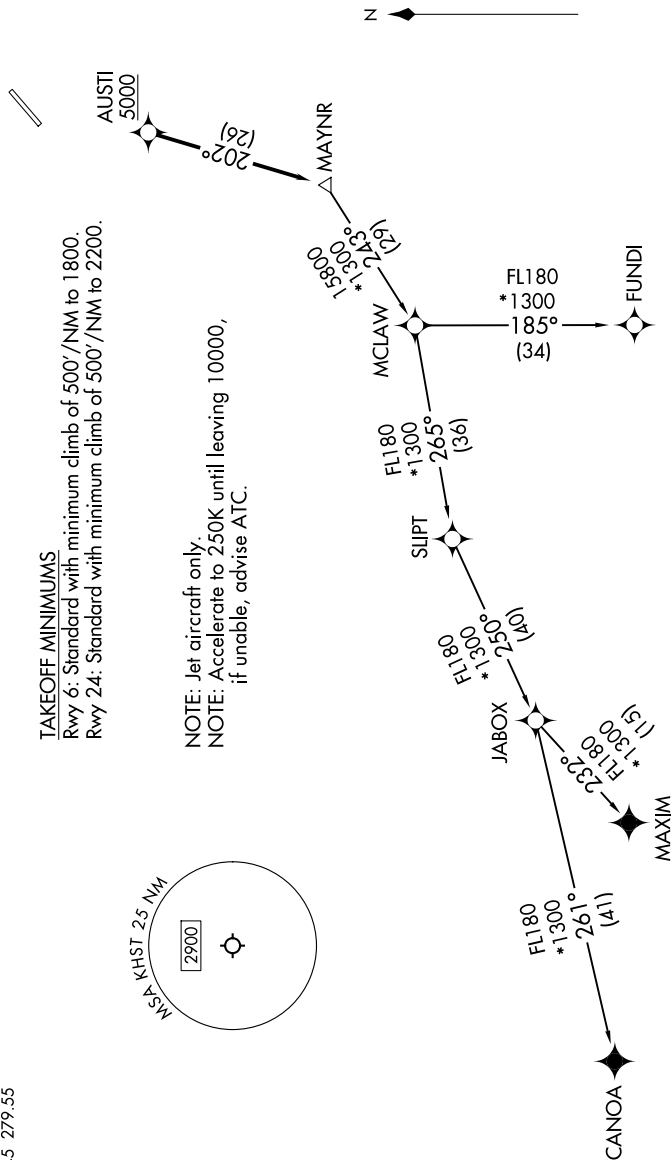

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 12 JUN 2025 to 10 JUL 2025

MAYNR THREE DEPARTURE (RNAV)

(MAYNR3.MAYNR) 31OCT24

HOMESTEAD, FLORIDA
HOMESTEAD ARB (KHST)