

WAAS CH 56523 W12A	APP CRS 118°	Rwy Idg TDZE Apt Elev	4400 3294 3298
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 12

CHADRON MUNI (CDR)

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¼ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 5900 direct
ECOPO and hold.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
-----------------------	--------------------------------------	-------------------------------

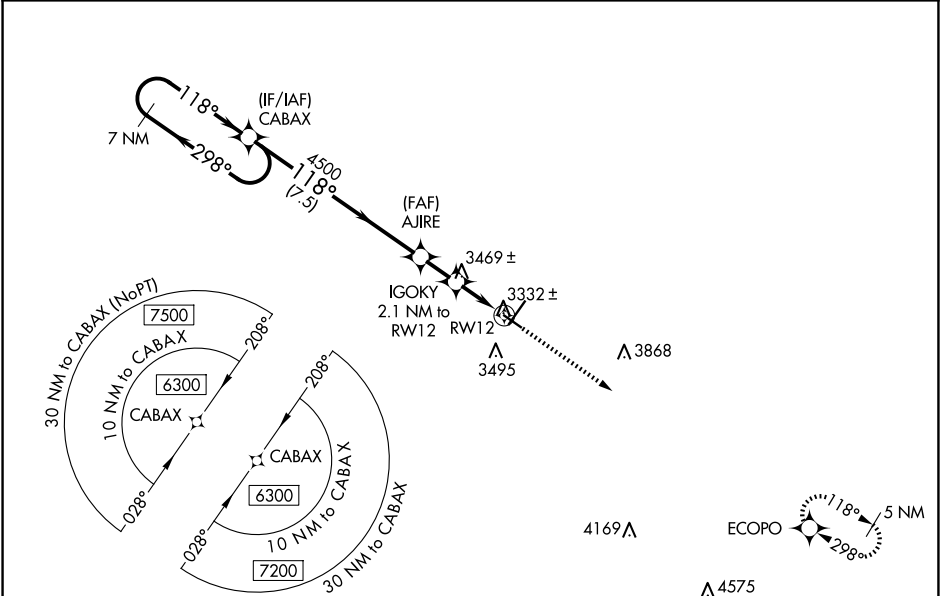

5017△ 4700±△				
7 NM Holding Pattern				
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).				
CABAX				
6300 ← 298° 118° → 4500				
GP 3.00° TCH 42				
7.5 NM 1.6 NM 2.1 NM				
CATEGORY A B C D				
LPV DA 3544-1 250 (300-1) NA				
LNAV/VNAV DA 3719-1½ 425 (500-1½) NA				
LNAV MDA 3720-1 426 (500-1) 3720-1¼ 426 (500-1¼) NA				
CIRCLING 3820-1 3920-1 3920-1¾ 622 (700-1¾) NA				
522 (600-1) 622 (700-1)				