

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>69523</b><br><b>W30A</b> | APP CRS<br><b>298°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4400</b><br><b>3290</b><br><b>3298</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 30

CHADRON MUNI (CDR)


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility 1⁄8 mile, LNAV/VNAV all Cats visibility 1⁄4 mile, and LNAV and Circling Cat C visibility 1⁄4 mile. Baro-VNAV and VDP NA with Pine Ridge altimeter setting.

MISSED APPROACH:  
Climb to 6300 direct CABAX and hold.

|                       |                                      |                                        |
|-----------------------|--------------------------------------|----------------------------------------|
| ASOS<br><b>118.05</b> | DENVER CENTER<br><b>127.95 338.2</b> | UNICOM<br><b>122.8</b> (CTAF) <b>0</b> |
|-----------------------|--------------------------------------|----------------------------------------|

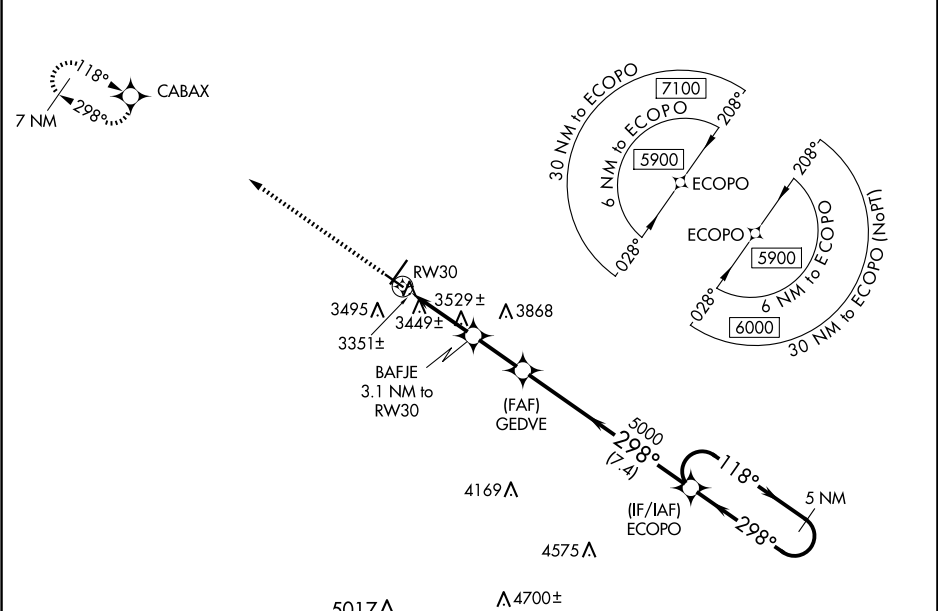

|           |          |           |
|-----------|----------|-----------|
| ELEV 3298 | <b>D</b> | TDZE 3290 |
|-----------|----------|-----------|

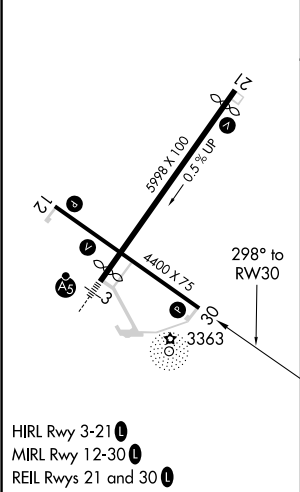

|                                                                                     |                                                                                     |                         |                         |                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------|-------------------------|-----------------------|
| 6300                                                                                | CABAX                                                                               | 5 NM Holding Pattern    |                         |                       |
|  |  |                         |                         |                       |
| *LNAV only                                                                          | BAFJE<br>3.1 NM to RW30                                                             | GEDVE<br>5000           | ECOPO                   | 118° →<br>← 298° 5900 |
|  | *1.4 NM to RW30                                                                     | 4300*                   | 5000                    | GP 3.00°<br>TCH 40    |
| → 1.4 NM                                                                            | 1.7 NM                                                                              | 2.2 NM                  | 7.4 NM                  |                       |
| CATEGORY                                                                            | A                                                                                   | B                       | C                       | D                     |
| LPV DA                                                                              | 3540-1 250 (300-1)                                                                  |                         |                         | NA                    |
| LNAV/VNAV DA                                                                        | 3767-1½ 477 (500-1½)                                                                |                         |                         | NA                    |
| LNAV MDA                                                                            | 3780-1 490 (500-1)                                                                  | 3780-1¾<br>490 (500-1¾) |                         | NA                    |
| CIRCLING                                                                            | 3820-1<br>522 (600-1)                                                               | 3920-1<br>622 (700-1)   | 3920-1¾<br>622 (700-1¾) | NA                    |