



LOC/DME I-EVV	APP CRS	Rwy Idg	8021
109.9	221°	TDZE	422
Chan 36		Apt Elev	422


ILS or LOC RWY 22
EVANSVILLE RGNL (E V V)

RADAR or DME required for procedure entry at AUGUS.				MALSR	MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.
Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.					

ATIS	EVANSVILLE APP CON ★	EVANSVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
120.2	124.025 290.9	118.7 (CTAF) 257.8	121.9	126.6	122.95

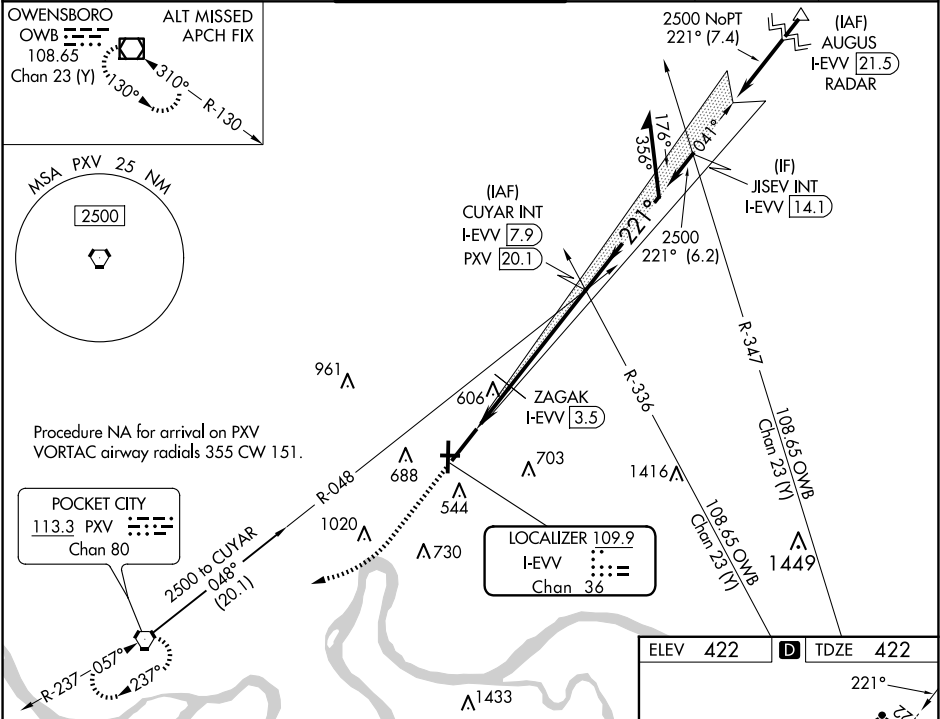

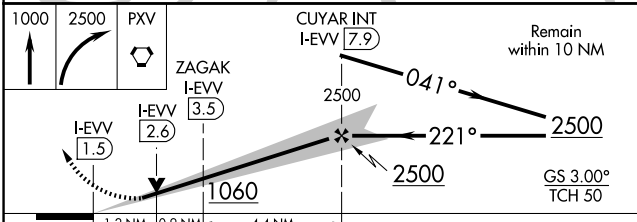1000 ↑	2500 ↗	PXV 		
		I-EVV 1.5	I-EVV 2.6	ZAGAK I-EVV 3.5
		1060	2500	2500
		1.2 NM	0.9 NM	4.4 NM
GS 3.00° TCH 50				
CATEGORY	A	B	C	D
S-ILS 22 *	622/24		200 (200-½)	
S-LOC 22	1060/24	638 (700-½)	1060-1¾	638 (700-1¾)
 CIRCLING	1060-1	638 (700-1)	1060-1¾ 638 (700-1¾)	1060-2 638 (700-2)
ZAGAK FIX MINIMUMS (DME REQUIRED)				
S-LOC 22	840/24	418 (500-½)	840/40	418 (500-¾)
 CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)

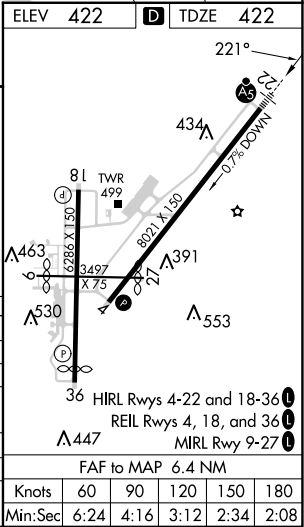

EC-2, 12 JUN 2025 to 10 JUL 2025

EC-2, 12 JUN 2025 to 10 JUL 2025