

WAAS CH 40002 W21A	APP CRS 208°	Rwy Idg TDZE Apt Elev	7619 4977 5045
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21L

PRESCOTT RGNL/ERNEST A LOVE FLD (PRC)

RNP APCH - GPS.

▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 47°C. For inoperative ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat C/D visibility to 1¾ SM. Circling Rwy 3L, 12, 30 NA at night.
Missed approach requires a minimum climb of 345 feet per NM to 7300.


MALSR

AS

|||

MISSED APPROACH: Climb to 5500 then climbing right turn to 9100 direct DILLY and hold, continue climb-in-hold to 9100.

ATIS 127.2	PHOENIX APP CON 133.575 281.55	PRESCOTT TOWER ★ 125.3 (CTAF) 1 257.9	GND CON 121.7	CLNC DEL 119.25	128.75 1	UNICOM 122.95
----------------------	--	--	-------------------------	---------------------------	-----------------	-------------------------

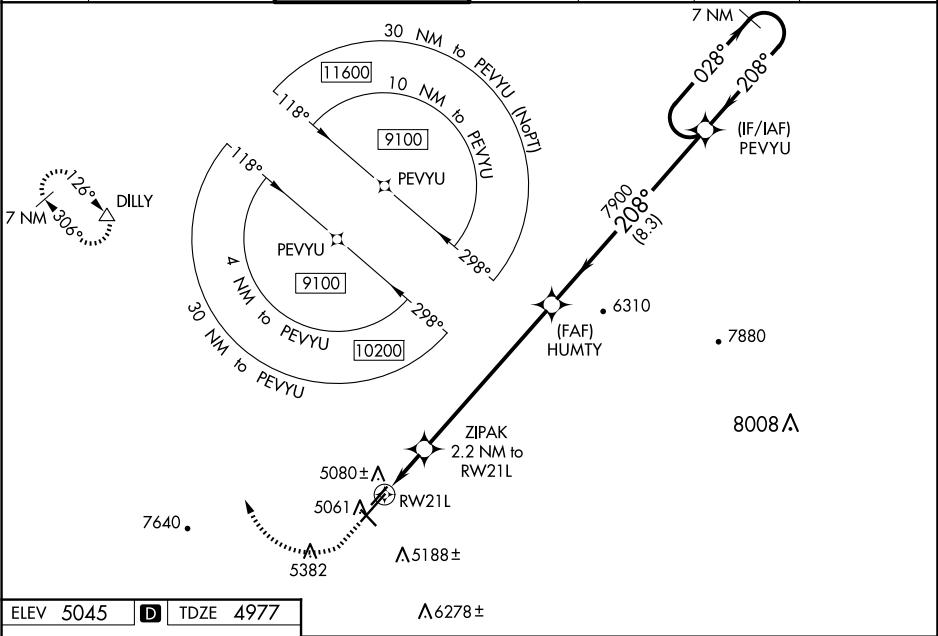

ELEV 5045	D	TDZE 4977
5500 9100 DILLY *LNAV only. ZIPAK 2.2 NM to RW21L HUMTY 7900 PEVYU 7 NM Holding Pattern 9100 GP 3.00° TCH 55		
21L 21R 3L 3R 12 30 4846 X 60 0.8% UP 7619 X 150 0.9% UP 4408 X 75 0.9% UP TWR 5087		
MIRL Rwy 3L-21R and 3R-21L MIRL Rwy 12-30 REIL Rwy 3R, 12, and 30		